

NAVIGATION NOTICE NO. 1-2005

Mississippi Valley Division

Great Lakes and Ohio River Division

Rev.97A
January 2005

INTRODUCTION:

1. As a result of partnering efforts with navigation interests, a consolidated Notice to Navigation Interests has been prepared for the Upper Mississippi River, and the Ohio River Systems. The intent is to provide consistency by replacing current district and division regulations with a joint notice that will be updated annually. The notice is applicable to the St. Paul, Rock Island, Chicago, St. Louis, Louisville, Nashville, Huntington, and Pittsburgh Districts of the U.S. Army Corps of Engineers.
2. The basic document includes policies that are applicable to all rivers, while the appendices cite policies applicable to certain rivers or projects. Also included as appendices are: District maintenance schedules and the Code of Federal Regulations containing the "Blue Book" of navigation regulations prescribed by the Secretary of the Army.
3. Comments on how we may improve this notice may be sent to the U. S. Army Corps of Engineers, Rock Island District, Clock Tower Building, PO Box 2004, Rock Island, IL 61204-2004, ATTN: CEMVR-OD-Q (LaVeta B. Bear), telephone 309/794/5366 or email laveta.b.bear@usace.army.mil.

GENERAL:

1. Reference revised Regulations, 33 C.F.R. 207.300, Ohio River, Mississippi River above Cairo, IL, and their tributaries; use, administration, and navigation, and 33 C.F.R. 207.800, Collection of navigation statistics. These regulations contain information essential to the navigation of those waters and may be found at Appendix E and Appendix F below. Copies of the above regulations may be obtained from lock operators without charge. The regulations are also located on the Rock Island District Navigation Information Connection, Public Notices. Web address: <http://www.mvr.usace.army.mil/navdata/notices.htm>
2. The following information is furnished in addition to the above-referenced regulations to provide guidance about the procedures, control, and management of the locks on the Mississippi River, Illinois Waterway and Ohio River System. Suggested towboat operations are also included that will enhance safety and reduce damage to Government structures, commercial vessels, and recreational craft.
3. 2005 Inland Waterways Conference, Nashville, TN will be held March 15th – 17th, 2005. For further information contact Tim Ethridge, MVD, 601-634-5615.

SAFETY:

1. Commercial and recreational craft shall use only the locks for river passage except for navigable pass dams, and authorized fixed weir passages.
2. Vessels shall not pass under gates in the dam when the gates are out of the water and the river is flowing freely through the gate opening.
3. Lockage of leaking or listing vessels may be refused. Leaking or listing vessels shall be moored in a location outside of the channel and outside of the Arrival Point so as not to interfere with passing navigation.
4. All craft and tows approaching a lock, within a distance of 200 feet of the upper or lower lock gate, shall proceed at a speed not greater than two miles per hour (rate of a slow walk) during normal flow conditions.
5. All tows entering the lock shall be properly aligned with the guide or lock wall. Tows may be required to stop prior to entering certain locks at which unusual conditions exist.
6. When an amber flashing light is displayed and approval is given by lock personnel, a descending or ascending vessel may approach and moor with a backing line to the guide wall; however, the head of the tow shall be no closer than 100 feet from the near end of the lock gate recess.
7. Burning fenders shall be dropped overboard immediately rather than being placed on the deck of a barge, towboat or vessel. Fenders shall not be secured to cleats or timberhead and left unattended.
8. When tows are underway in the lock approaches or lock chamber and there is a potential for damage to the structure a minimum of two deckhands with fenders shall be stationed at the head end of every tow 100 feet or greater in width. One deckhand with a fender shall be required at the head end of tows less than 100 feet in width. Additional personnel shall be required at the aft end if the lock operator determines that it is necessary to protect the lock and guide walls from damage.
9. It is the responsibility of the vessel operator to provide adequate mooring lines. The lock operator may require mooring lines to be replaced with satisfactory lines before lockage is made if the lines appear to be of such quality, size, or condition that would make safe lockage questionable.
10. Mates and deckhands, when preparing to moor within the lock chambers, shall not throw heavy mooring lines onto the walls, but shall wait for a heaving line.
11. All towboat crews, while locking or moving a tow into or out of a lock chamber, must station themselves to preclude the possibility of being injured by the parting of a cable or line under strain. Single part lines only will be used to check a moving tow. During inclement weather conditions (snow and ice) the working area of the tow where lines are used shall be free of snow and ice to prevent injury to towing industry personnel. Working lines shall be kept dry and in working condition (not frozen) to allow lines to be worked properly and to prevent injury to personnel.
12. Towboat crewmembers shall not jump between moving tows and lock or guide walls while preparing for lockage, locking, or departing lock. Use of lock wall ladder ways is permitted only after tows are securely moored and the chamber is at upper pool.

13. Tabulated below are the minimum numbers of vessel personnel required for handling lines during lockages. The captain/pilot can not act as a deckhand.

TYPE OF VESSEL OR TOW	MINIMUM NUMBER OF PERSONNEL	MINIMUM NUMBER OF LINES USED	MINIMUM NUMBER OF EMERGENCY USE LINES
Vessels less than 65 feet	1	1	1
Towboats	1	1	1
All other vessels requiring single lockage	2	*2 (see Appendix B, paragraph B1)	1
Tows requiring double lockage (one deckhand to remain with first cut)	3	2	1
Set-over tows	3	2	1
Knock-out tows	2	2	1

*Please reference the special requirements on page 3, #17.

14. All vessels, when in the locks, shall be moored and/or moved as directed by the lock operator.

15. Commercial towing companies shall ensure that vessel operators and boat crew members have received orientation and training in all aspects of deck work and lockage procedures to ensure the safety of personnel, floating plant, and structures.

16. All cylinders or containers holding gases or liquids under pressure or any other chemical or hazardous substance shall be securely fastened to the hull of the vessel to prevent their rolling overboard into the lock chamber.

17. All containers holding paint, gasoline, or other volatile materials shall be securely closed with tight fitting covers.

OPERATIONAL ASPECTS:

1. Commercial fishing craft are included in the classification "recreational craft" when considering the precedence at the locks.

2. Personal watercraft of the "sit-down" variety, (those you sit on and ride), will be accepted for lockage. The "stand-up" variety, (those that require the vessel to be moving for the operator to be out of the water), will not be accepted for lockage unless the craft is tied off to and locked through with an approved vessel, and the operator of the "stand-up" craft boards the approved vessel. Operators of personal watercraft and their passengers are required to wear Coast Guard approved PFD=s during lockage.

3. The sides of all vessels passing through the locks shall be free from projections that may damage lock structures. Suitable fenders shall be used with all commercial tows passing through the locks to prevent damage to the lock walls and structures. Fenders shall be cylindrical in shape and no less than 6 inches in diameter. The fenders shall be used on guide walls and lock chambers to protect the structures. The fenders shall be manufactured or fabricated for the purpose of fendering, using woven rope; laminated, molded reinforced, natural, or synthetic rubber, or other suitable material. Single, double, or triple strands of mooring line, with or without knots, and old tires will not be considered as suitable fenders. Lock operators may refuse lockage to all commercial tows not conforming to the above.

4. The Corps of Engineers endorses the towing industry initiative toward voluntary "self help," such as pulling unpowered cuts at locks where significant delays are being experienced because of high lockage demand, lock repairs, or some other reason.

5. During severe winter navigation conditions, the length and width of the tows may be restricted to facilitate passage of the tow into the lock chamber and to minimize lock structural damage.

6. Rake to box ice couplings the entire width of the tow, at break points of the tow, will be required at all locks when ice is present at the lock. Double tripping and use of industry helper boats during ice conditions will be required if proper couplings are not accomplished prior to arrival at the locks. Failure to have the tow configured properly may result in loss of lock turn. Tow configuration to ice couplings shall not be accomplished at the lock or lock approach.

7. Tows using locks equipped with floating mooring bits shall use at least one line on each of two floating bits if the tow length permits. Floating mooring bits shall not be used to check a tow.

8. In a knockout lockage, the towboat shall be placed in the hole alongside the rear barges and should be located sufficiently forward to allow for ample clearance between its stern and the mitering gates. While exiting from any lockage, the towboat shall proceed slowly to reduce backwash action and possible damage to lock gates.

9. Radio communications between a lock and an approaching tow are required at all times. All tows shall have a positive two-way voice communication between the pilot and the head of the tow to facilitate proper and safe approach to the lock guide wall and subsequent entrance into the lock chamber. All tows that decide to switch to another channel during the locking process for communication with their deckhands will be required to inform the lock personnel as to what channel they are changing to.

10. Lock personnel will monitor the frequencies indicated on the following page. However, the District Engineers are authorized to require that the initial contact to any lock be made on other frequencies where circumstances indicate necessity.

Initial contact with locks is as follows:UPPER MISSISSIPPI RIVER

Upper St. Anthony Falls (USAF) to Lock 24 and Melvin Price Lock 156.7 MHz (Channel 14)
Locks 25 and 27 156.6 MHz (Channel 12)

ILLINOIS WATERWAY

T.J. O'Brien L/D and Chicago Harbor Lock 156.8 MHz (Channel 16)
All other Locks 156.7 MHz (Channel 14)


OHIO RIVER


Huntington, Louisville, Nashville
and Pittsburgh District Locks 156.65 MHz (Channel 13)

Louisville and Nashville District
Locks also monitor 156.8 MHz (Channel 16)

All tows awaiting lockage shall monitor the appropriate lock channel at all times. This will allow the lock personnel the capability of calling tows in the case of needing pull boats, broadcasting general announcements, call for preparation for lockage, etc.

11. Under normal conditions, tows that can be arranged to avoid a double lockage shall be rearranged prior to approaching the lock. Non-compliance will result in not being assigned a lock turn, until tow has been rearranged to comply or until no other vessel awaits lockage.
12. Where additional mooring facilities are provided, tows that must be rearranged in the approach area; i.e., set-overs, jackknives, etc., shall rearrange at these moorings, prior to entering the lock, if they must wait for entry. Lock operators should be contacted prior to arrival and will render a decision whether the tow should be rearranged at the moorings or in the lock.
13. Towboats, when entering a lock, must remain fully attached to the barges until the tow has been stopped and properly moored. Barges within the tow configuration must be properly cabled. Lockage may be refused if lock operator considers barge couplings inadequate.
14. When moving or making up tows prior to leaving the lock in an up bound movement, towboat operators are required to **keep all barges secured to the lock or guide wall**. At the locks where traveling mooring bits are used, the line shall not be released until the regulator **mooring line is secured** at the bow. Generally, the deckhand will not release snubbing and holding lines from the lock or guide walls until the towboat is **properly secured to the tow**. For a single lockage, with a towboat only set over, deviating from this procedure will be allowed if the immediate situation **will permit safe departure** under power and a lock operator walks a line out with the tow until the towboat is again adequately secured to the tow. **Lock operators will assist** by moving barges with tow-haulage equipment. However, when moving barges from the lock chamber, it is the responsibility of the **vessel master** to assure that adequate lines and personnel are available for safe handling and mooring of the tow or sections to the lock or guide walls. **Sufficient personnel** shall remain with the other sections to assure their security.
15. When leaving the lock in down bound movement, rearrangement of tows in motion will be permitted while passing out of the lock at the discretion of the lockmaster. If there is a floating plant, bridges, or other structure located immediately downstream from the lock, these procedures shall not be used.
16. Lockage lengths in excess of 595 feet, but not more than 600 feet, will be permitted with the following conditions:
- The vessel operator shall inform the lock operator by radio, prior to arrival, as to the precise overall length of an integrated tow (single lockage) or the cut lengths of a multiple lockage the number of barges in the tow, cargo type, and tonnage. Failure to provide all information may result in refusal of lockage.
 - A tow may be required to have a total of four lines, two each leading fore and aft, at the discretion of the lock operator. The lines shall be in good condition.
 - The pilot shall be in the pilothouse and be in constant radio contact with lock personnel during the entire lockage procedure.
 - Experienced deck personnel shall be stationed at each end of the tow to monitor movement.
17. Lockage of tows wider than 108 feet for a 110-foot chamber, 82 feet for an 84-foot chamber, and 54 feet for a 56-foot chamber will be refused.
18. During the high water season, strong out drafts occur at the upstream approach to some navigation locks. On the Upper Mississippi River and the Illinois Waterway the out draft signals are displayed on the upper end of the land guide walls, (river wall bullnose at Lockport Lock), and may be orange or amber. At some locks, similar signs are also displayed on the downstream end of the lower guide wall for the information of upbound tows. All vessel operators are directed to exercise extreme caution when approaching locks for a downbound lockage or when leaving locks upbound, where out draft conditions exist. Double trips may be required if doubt exists as to the ability of the tow to enter or leave the lock safely.
19. When requested, the pilot of the towboat shall provide an accurate description of the contents of any covered or tank barge in their tow. Transiting of the locks with unknown cargos will not be permitted. All towboats are required to provide accurate, detailed information concerning commodity classification and tonnage. Lockage turn may be forfeited if tow pilots do not provide this data.
20. All deck barges loaded with rock, scrap material, construction equipment and other similar material shall be loaded to allow for safe passage of crew members along the edge of the barges. A minimum of 2 feet of clear space shall be **maintained along the edge of all of the barges**. The barges shall be loaded such that the material does not move or fall into the 2-foot wide clear space **while moving or transporting the barges**. **Additionally, material** shall be loaded on barges such that it will not become dislodged or moved during the locking process, possibly falling off the barge into the lock chamber or coming to rest protruding off the edge of the barge. Lock operators may refuse lockage to all commercial tows not conforming to the above.

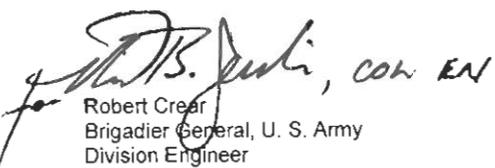
Robert Crear
Brigadier General, U. S. Army
Division Engineer
Mississippi Valley Division

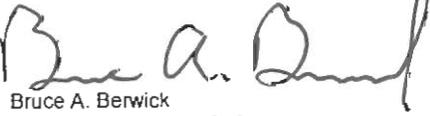
Bruce A. Berwick
Brigadier General, U.S. Army
Division Engineer
Great Lakes and Ohio River Division

APPENDIX A

Upper Mississippi RiverA. St. Paul District

1. Locking Procedures During Outdraft Conditions at Lock and Dam 3, Welch, Minnesota, UMRM 797R:
 - a. The Corps has adopted a policy for pulling tows in the upbound direction when flows exceed 21,000 cfs. Lock personnel will use the tow haulage units to pull any combination of empty or loaded barges to a point just clearing the upper miter gates, provided that the section pulled does not have one or more lead loaded spike barges that are not adjacent to the guidewall. One additional deckhand will be required to handle lines on the section being pulled.
 - b. If at any time the lockmaster or his representative feels there is danger in using the tow haulage unit, he may require the towing owners and/or operators to double trip through the lock.
 - c. If a downbound tow does not have sufficient control to get safely into the lock in a timely manner, the lockmaster may revoke priority for lockage. If problems locking are anticipated, a bow boat is usually available and can be used in lieu of double tripping.
 - d. Lock and Dam No. 2 and Lock and Dam No. 4 will display checked flags during high flow conditions at Lock and Dam No. 3.
2. Upbound Locking Procedures During Outdraft Conditions at Lock and Dam 5A, Fountain City, Wisconsin, UMRM 729R; and Lock and Dam 6, Trempealeau, Wisconsin, UMRM 714L:
 - a. When flows exceed 59,000 cfs, the Corps has adopted a policy for pulling tows in the upbound direction. Lock personnel will use the tow haulage units to pull any combination of empty or loaded barges to a point just clearing the upper miter gates, provided that the section pulled does not have one or more lead loaded spike barges that are not adjacent to the guidewall. One bitt will be used from the bow barge and the other bitt will be used for lines from the second barge back from the bow end. One additional deckhand will be required to handle lines on the section being pulled.
 - b. If at any time the lockmaster or his representative feels there is danger in using the tow haulage unit, he may require the towing owners and/or operators to double trip through the lock.
3. Upper St. Anthony Falls (USAF) Lock. The St. Paul District will be implementing a trial 1-person locking operations test at USAF on or about 1 May 2005 and running until the end of the navigation season. We are interested in any comments during the test to evaluate if there were any negative impacts to the navigation industry. Please contact Lockmaster Steve Lenhart at 612-333-5336 with your comments.
4. The St. Paul District Corps of Engineers, in association with a variety of river stakeholders, is planning a drawdown of Pool 5 during the summer of 2005. The purpose of the proposed drawdown is to promote the growth of aquatic vegetation, particularly perennial emergent species. This effort would be similar to pool-scale drawdown in Pool 8 in 2001 and 2002. Current plans call for a maximum drawdown at Lock and Dam 5 (river mile 738.1) of 1.5 feet. The drawdown is scheduled to begin about 15 June 2005, and end on 15 September 2005. Initiation and continuation of the drawdown will be dependent on suitable river flows. During the drawdown, the Corps would maintain the 9-foot navigation channel, and no adverse affects to commercial navigation should result. This would be accomplished by dredging the channel slightly deeper in critical areas prior to imitating the drawdown. If a drawdown in Pool 5 were pursued, the Corps would coordinate with the U.S. Coast Guard and issue the necessary notices and advisories.

B. Rock Island District

1. The practice of heeling off the lockwall (using lockwall for leverage) will not be tolerated while departing the locks, unless the tow has significant forward movement and it is absolutely necessary. (The purpose for this restriction is to reduce the very costly damage to the scour protection along the guide walls and beneath the lower and upper sills). Use of heeling line from barge to a pin on lockwall may be used in the Rock Island District to assist in swinging head of tow away from lockwall. A minimum 8 foot lead will be required and wheel wash will be directed out towards the river and not against the guide wall.
2. During double lockages, the stern of the first cut must be equipped with kevels or timberheads if used to stop the cut. Use of "buttons" in stopping a cut is prohibited. Cuts not properly equipped with timberheads or kevels at the break coupling will be required to use a helper boat to stop the cut. The practice of stopping the first cut with the quarter kevel is also prohibited.
3. At Lock 19, Keokuk, Iowa, due to very strong currents pulling along the short upper guide wall during the filling operation of the lock, all downbound commercial vessels shall not enter the forebay until the upper gates are submerged and the lockmaster has given the vessel permission to proceed.
4. At Lock 19, Keokuk, Iowa, due to strong currents near intakes and extreme turbulence within the lock chamber, all personal watercraft, i.e. wet bikes, jet bikes, jet skis, wave runners, wave jumpers, etc. will not be locked through under their own power. Personal watercraft will be locked through while being towed into and out of the lock by a conventional pleasure craft, i.e. bass boat, ski boat, runabout, day cruiser, houseboat, etc. While the personal watercraft is being towed into, locked through and towed out of the lock approach, they shall not be ridden or operated. The operator of the personal watercraft will be required to board the vessel performing the towing of the personal watercraft. Boarding and disembarking will not delay traffic in any way.

C. St. Louis District

1. At Lock 24, Clarksville, Missouri, it is now mandatory for all Northbound tows to land on the protection cell at the end of the lower guide wall. Due to the critical condition of the aging guide wall, all tows are required to land on the cell and then pivot on the cell with the lead barge in the port string. Tows may proceed forward after they are correctly aligned for straight entry into the lock to minimize impacts to the guide wall.
2. At Lock 25, Winfield, Missouri, it is recommended that prior to arrival at Lock 25, all Northbound tows insure that they have the correct break coupling rigging to expedite the locking process. Many tows are arriving without the proper break coupling rigging. Delays are increasing during the remaking of the coupling due to complete relaying of wires and rigging.

APPENDIX B

Illinois Waterway

A. Chicago District

1. The Chicago Harbor Lock is at the upper end of the Illinois Waterway, which is a tributary of the Mississippi River. All rules and regulations defined in 33 CFR 207.300, Ohio River, Mississippi River above Cairo, Illinois, and their tributaries; use, administration and navigation and 33 CFR 207.800, Collection of navigation statistics shall apply except where they conflict with 33 CFR 207.420, Chicago River, IL, Chicago Harbor Lock and Controlling Works; use, administration and navigation of the lock at the mouth of the river.

2. The Chicago Harbor Lock is extending the successful implementation of new signal lights rules for all lockages, at Chicago River mile 0, Illinois Waterway chart mile 327.2, NOAA chart #14928. SIGNAL LIGHTS FOR LOCKAGE: Due to density of traffic and congestion in Chicago Harbor, Chicago Harbor Lock will use the red-amber-green lockage signal lights, in lieu of red-green signal lights until final rule is implemented.

a. The meaning of the lock signal lights located near the east end of the northeast guide wall and at the west end of the northwest lock wall are as follows:

(1) Red light: Lock is not ready for entrance. All vessels shall stand clear and shall allow unobstructed departure for the vessels leaving the lock chamber.

(2) Amber light: Lock is ready for entrance of all government vessels and certified passenger vessels waiting in the queuing area when given permission to enter the lock chamber. All other vessels shall only enter the lock chamber when specifically directed by the lock operator via radio, telephone or voice.

(3) Green light: Lock is ready for entrance by all other small passenger vessels, fishing vessels and recreational vessels. During the green light, certified passenger vessels, such as late arrivals to the queuing area, shall not enter the lock chamber unless specifically directed by the lock operator via radio, telephone or voice.

b. **Definitions:**

(1) Certified passenger vessel: A commercial passenger vessel which was issued a current Certified of Inspection by the U.S. Coast Guard to carry more than 6 passengers.

(2) Queuing area: The designated lock waiting area for vessels less than 100 gross tons. The queuing area for east transits to the lake begins at Ogden Slip and the queuing area for west transits to the river begins at Municipal Pier No. 1 Light.

B. Rock Island District

1. On the Illinois Waterway, at Lockport, Brandon Road, Dresden Island, Marseilles and Starved Rock Locks, upbound tows with 1 barge length and up to 2 barges wide will require 2 deckhands and 2 lines. Under normal conditions, downbound tows with 1 barge length and up to 2 barges wide transiting the locks identified above will only require 1 deckhand and 1 line on the floating mooring bit and engines running at idle. At T.J. O'Brien, Peoria and LaGrange locks, 1 deckhand and 1 line are acceptable for lockage in both directions for tow configurations described above. At all locks, the navigator will provide an additional line or lines at the lock operator's discretion, or when conditions indicate that such added precautions are necessary for safe lockage. All vessels will have one additional line, at least equal in length to the lock lines, on the head (working side) of the tow for emergency use.

2. Only vessels awaiting lockage turn at Marseilles Lock will be allowed to moor in Marseilles Canal. Mooring of tows or barges for other reasons is prohibited.

3. Due to strong currents near intakes and extreme turbulence within the lock chamber, all personal watercraft, i.e. wet bikes, jet bikes, jet skis, wave runners, wave jumpers, etc. will not be locked while under their own power at Lockport Lock, Brandon Road Lock, Dresden Island Lock, Marseilles Lock, Starved Rock Lock, Peoria Lock, and LaGrange Lock. Personal watercraft will be locked through while being towed into and out of the lock by a conventional pleasure craft, i.e. bass boat, ski boat, runabout, day cruiser, houseboat, etc. While the personal watercraft are being towed into, locked through and towed out of the lock approach, they shall not be ridden or operated. The operator of the personal watercraft will be required to board the vessel performing the towing of the personal watercraft. Boarding and disembarking is not to delay traffic in any way.

C. St. Louis District

No special instructions for this reach.

APPENDIX C

Ohio River and Tributaries

A. Pittsburgh District

1. At Emsworth, Dashields, Montgomery, and Lock 2, Monongahela River, set over lockages will be done at the discretion of the Lockmaster.
2. At Emsworth a third line (breast line) is required for upbound lockages due to the heavy turbulence created during the lock chambers filling.
3. The large land lock chamber at Montgomery Lock and Dam is only 597 feet long.
4. Commercial vessels should note when locking through Lock 4, Allegheny River, the depth of water over the upper sill is 0.6 feet less than the upper gage reading. An upper gage reading of 9.0 correlates to 8.4 feet of water over the upper sill.

Appendix C (continued)**B. Huntington District**

1. The towing industry and barge owners operating on the Kanawha River with the concurrence of the Corps of Engineers have agreed to implement the Switch Boat Program for downbound lockages through the land chamber of Marmet Locks and Dam. Details of billing procedures can be obtained by contacting one of the committee members as follow:

David Reed	Crouse Corporation	(606)654-6843
Vernon Smith	Ingram Barge Co.	(412)469-8705
John Reynolds	American Electric Power	(304)675-6300
Ray Thornton	The Ohio River Company	(304)523-6461

2. Out draft conditions for a downbound approach when the total dam opening is five feet or more at London or Marmet, require lock personnel to meet all downbound tows at the end of the wall when requested by vessel operators.

3. Deckhands must stand clear of haul-out cables during all pull-out operations.

C. Louisville District

1. The U.S. Coast Guard, Marine Safety Office, Louisville will place its Vessel Traffic Service (VTS) into operation when the upper gage at McAlpine Locks and Dam reaches 13.0. All upbound vessels should contact "Louisville Traffic" on Channel 13 upon arrival at McAlpine Locks and Dam. All downbound vessels should contact "Louisville Traffic" on Channel 13 upon arrival at Twelve Mile Island.

2. It is occasionally necessary to flush drift or ice from the upper lock approaches at Markland and Cannelton Locks and Dams. During these periods, flow is passed over a partially submerged emergency gate and through the auxiliary (600-foot) lock chamber. The auxiliary chamber will be closed during these flushing procedures and all traffic will be passed through the main (1200-foot) lock. Navigators should observe extreme caution and carefully follow the instructions of lock operators regarding the flushing operations.

3. In the Louisville District, the following radio procedures shall be observed:

- a. Vessel operators should monitor Marine Channels 13 and 16 while awaiting lockage.
- b. Vessel operators should continuously monitor Channel 16 during lockages. Lock operators will use that channel to contact vessels.
- c. Vessel operators should contact lock personnel on Channel 13 during lockages and switch to Channel 14 when requested.

4. McAlpine Locks and Dam Radio Contact Location: Due to traffic in the Louisville and Portland Canal, downbound vessels are permitted to announce their presence for lockage when they reach Six Mile Island (Mile 597.1).

5. Markland Locks and Dam: During periods of high drift, lock operators may instruct tows to stop closer than 100 feet from the upper miter gates of the main chamber to prevent excessive build up of drift between the head of the tow and the miter gates.

D. Nashville District

1. No vessel shall attempt to enter Kentucky Lock with less than 12 inches clearance over the miter sill.

2. Reference Notice to Navigation Interests CEORN-CO-W 93- 22 dated May 5, 1993.

SUBJECT: Procedures for Locking Fast Doubles at Pickwick Locks, Tennessee River Mile 206.7.

For the past few years most fifteen barge tows have been locked through Pickwick as a fast double using both locks, and the procedure has reflected a considerable reduction in locking time. The Nashville District Corps of Engineers, in cooperation with the Navigation Industry, plans to continue the fast double procedure for the purpose of enhancing safety and expediting lockages. The following guidelines will be used for the fast double lockages at Pickwick locks.

a. Downbound fast double lockages will not be conducted when the total discharge exceeds 100,000 cfs unless specifically requested by the operator of the vessel to be locked. When discharge exceeds 100,000 cfs a request to be locked as a fast double will be honored if, in the lock operator's opinion, it is safe to do so, based on such factors as water levels, actual amount of discharge, wind, etc.

b. A downbound fast double lockage will be accomplished by locking the fifteen barges in the 1,000-foot main lock and the towboat in the 600-foot auxiliary lock. Once locked down, the towboat will move to the main lock and prepare to receive the barges as they are pulled from the chamber with the lock's haulage unit equipment. Upon request by the towboat operator, the towboat may face up to the tow and pull the barge from the chamber in lieu of using the lock's haulage unit. In either event a crew member should be stationed on the upstream end of the tow and inform the towboat operator when the stern of the tow sufficiently clears the short wall to provide clearance for the boat to move in and make up to the stern of the tow. Proper protective devices must be used to protect concrete and wall armor during the pull out operation.

c. Upbound fast double lockages will not be conducted when there is discharge through the spillways, regardless of the amount, or when total discharge exceeds 100,000 cfs. When either of the above conditions exist fifteen barge upbound tows will be locked as straight doubles.

d. During an upbound fast double lockage the towboat should pull the tow out of the lock chamber a distance that will permit the towboat to safely remake to its tow. The lock's haulage unit equipment will not normally be used to pull an upbound fast double cut from the chamber because it would still be necessary for the towboat to continue the pull out until a sufficient clearance is achieved.

e. With the exception of paragraphs c and d above all other aspects of locking and upbound fast double are the same as stated in a and b for downbound lockages.

Appendix C (continued) and Appendix D

f. If, for any reason, a vessel operator desires to lock a fifteen barge tow as a straight double and conditions are such to allow for a fast double lockage, he will be locked as a straight double if determined by the lock operator that it will not create any additional delay to any other vessel(s). If the lock operator determines additional delay will be created and the vessel operator still desires a straight double lockage, his position in queue will be reestablished until such time additional delay to other traffic does not result. Tows considered in making such determination do not necessarily have to be at the arrival point.

g. The lock operator may require that a fifteen barge tow be locked as a straight double through either lock, rather than as a fast double, due to various factors such as flow, wind, mechanical problems, approach obstruction, or any time when it will result in the most efficient utilization of the lock.

h. Prior to beginning each lockage, procedural aspects of the lockage will be coordinated between the lock and vessel operators in an effort to insure a mutual and thorough understanding of the locking procedure.

3. Due to the draw in the upstream lock approach when filling the chamber on Pickwick main lock all cuts of tows must be at the 600-foot marker or greater on the upper approach wall and have a minimum of 2 lines, four to six part each under normal conditions. During abnormal conditions/adverse weather conditions, tows may tie above the upper gates with additional lines provided the lock operator approves.

E. General

1. The lockage of oversize tows is not permitted on the Ohio River and tributaries. An oversize tow being defined as a tow that can not be locked through a 1200-foot lock in one lockage.

APPENDIX D

MISSISSIPPI VALLEY DIVISION

Repair/Maintenance Schedule for 2005

ILLINOIS WATERWAY

326.5 – 80.2 Locks 1 - 8
(Rock Island District) There are no long-term closures scheduled for the Illinois Waterway during the 2005/2006 season.

MISSISSIPPI RIVER

<u>River Mile</u>	<u>Project</u>	<u>Repairs</u>	<u>Dates</u>	<u>Remarks</u>
853.9	USAF Lock (St. Paul District)	Lock dewatering for concrete and structural repairs	1 Dec 2004 - 20 March 2005	Work to be performed in non-navigation season
815.2	Lock 2 (St. Paul District)	Installation of lock bulkhead slots & cover structures	1 Dec 2004 - 1 March 2005	Work to be performed in non-navigation season
738.1	Lock 5 (St. Paul District)	Installation of lock bulkhead slots & cover structures	1 Dec 2004 - 1 Mar 2005	Work to be performed in non-navigation season
679.2	Lock 8 (St. Paul District)	Installation of lock bulkhead slots & cover structures	5 Dec 2005 - 1 Mar 2006	Work to be performed in non-navigation season
647.9	Lock 9 (St. Paul District)	Installation of lock bulkhead slots & cover structures	5 Dec 2005 - 1 Mar 2006	Work to be performed in non-navigation season
615.0	Lock 10 (St. Paul District)	Major Rehabilitation of lock site, lockwalls & guidewalls	1 Mar 2005 - 1 Mar 2008	Guidewall & Vertical Lockwall concrete rehab work to be performed in non-navigation season.
583.0	Lock 11 (Rock Island District)	Major Rehabilitation and Maintenance	15 Dec, 2005 - 15 Mar, 2006	Construction of lower bulkhead slots, Concrete repair, Valve repair
364.3	Lock 19 (Rock Island District)	Major Rehabilitation of lock	15 Dec, 2005 - 15 Mar, 2006	Replacement of Lower Miter Gates and Replacement/Rehab of Mechanical and Electrical Systems.

Great Lakes and Ohio River Division

It is anticipated that major maintenance and repairs will be performed at the following locations during Calendar Year 2005/2006. This notice may require periodic revision. It is given so that industrial waterway users may have a general knowledge of the lock outages and can plan their operations accordingly. Factors, which may affect this schedule, are the delivery of materials, repairs required but not anticipated, emergency repairs as a result of accidents, and funding.

All interested parties should review the maintenance schedule for impact. Additional notices furnishing specific information and operating requirements will be published approximately two weeks in advance of commencing the work items listed.

Repair/Maintenance Schedule for 2005

<u>River Mile</u>	<u>Project</u>	<u>Repairs</u>	<u>Dates</u>	<u>Remarks</u>
<u>Chicago District Lock Closures</u>				
0 327.2	CHICAGO RIVER CHICAGO HARBOR LOCK - Illinois Waterway NOAA CHART #14928			
1.Lock status and latest closure information will be provided via a recorded message on the Chicago Harbor Lock Construction Information Line (312) 353-6400, ext. 5100.				
<u>Cumberland River System</u>				
313.5	Cordell Hull Lock (Nashville District)	Inspection and Repairs	Mar 7 – Mar 31, 2005	Lock Closed, No auxiliary lock available
216.1	Old Hickory Lock (Nashville District)	Inspection and Repair	May 10 – May 26, 2005	Lock closed, No auxiliary lock available
<u>Green River System</u>				
9.1	Lock and Dam 1 (Louisville District)	Sill repairs & dewatering	Aug 10 – Aug 27, 2005	Lock closed, No auxiliary lock available
<u>Kanawha River System</u>				
82.2	London Lock and Dam (Huntington District)	Roller Gate Bottom Seal Mod Main Chamber Lower Gate Seal Repair/Mod Main Chamber Top Anchorage Adj/Repairs	May 23 – Jul 1, 2005	Main Lock Closed
67.7	Marmet Locks and Dam (Huntington District)	Roller gate Chain Repair/Replacement	Concurrent (14 days)	No Delays
31.1	Winfield Lock and Dam	Aux Lock Repairs (Huntington District) (Old Land Chamber Lower Gates)	Jul 4 – Jul 29, 2005	No Delays
<u>Monongahela River System</u>				
90.8	Point Marion Lock and Dam (Pittsburgh District)	Dewater 84' x 720' Lock Chamber Repair Lock Gates and Sills	Mar 29 - Apr 11, 2005	Single Chamber Closed No Traffic Can Pass Through Lock
61.2	Maxwell Locks and Dam (Pittsburgh District)	Dewater 84' x 720' River Chamber, Repair Gates, Seals and Anchorages	May 2 - June 15, 2005	Chamber Closed Intermittent Delays
41.5	Lock and Dam 4 (Pittsburgh District)	Replace Downstream Lock Gates	Dec 6-8, 2005	Single Chamber Closed No Traffic Can Pass Through Lock
<u>Ohio River System</u>				
54.3	New Cumberland L/D (Pittsburgh District)	Dewater 110' X 600' Land Chamber Repair Gates, Sills and Anchorages	Jul 6 – Aug 18, 2005	Small Chamber Closed Intermittent Delays
54.3	New Cumberland L/D (Pittsburgh District)	Repairs to the Service Bridge Lift Span over 110' X 600' Land Chamber	Aug 19 – Sep 2, 2005	Small Chamber Closed Intermittent Delays
84.2	Pike Island Locks and Dam	Replace River Wall Filling Valve	Oct 3 - Oct 21, 2005	Small Chamber Closed

Great Lakes and Ohio River Division (continued)**Repair/Maintenance Schedule for 2005**

<u>River Mile</u>	<u>Project</u>	<u>Repairs</u>	<u>Dates</u>	<u>Remarks</u>
<u>Ohio River System (continued)</u>				
126.4	Hannibal Locks and Dam (Pittsburgh District)	Replace Land Wall Emptying Valve and Renovate Operating Machinery	Oct 24 - Nov 10, 2005	Small Chamber Closed Intermittent Delays
161.7	Willow Island Locks and Dam (Huntington District)	Tainter gate Side Seal Repairs Main Chamber Floating Mooring Bitt Repairs Mod Aux Lock Miter gates for Lifting	Nov 14 – Dec 9, 2005	No Delays
237.5	Racine Locks and Dam (Huntington District)	Main Lock Miter Gate Repairs Emergency Gate inspection/Repairs Tainter Gate Side Seal Repairs	Aug 1 – Oct 14, 2005	Main Lock Closed Self-Help
203.9	Belleville Locks and Dam (Huntington District)	Main Lock Lower Gate Repairs Aux Lock Upper Gate Strut Arm Adj/Repair Bulkhead Crane Cable Replacement	Oct 17 – Nov 11, 2005	Main Lock Intermittent 8 Hour Closures
279.2	RC Byrd Locks and Dam (Huntington District)	Culvert Valve Cable Repl. Strut Arm/Sector Pin Bushing Cylinder Changeout – Lower Gate Top Anchorage Adjustments	Concurrent (21 days)	Main Chamber Minor Delays
341.0	Greenup Locks and Dam (Huntington District)	Main Lock Culvert Valve – RWE Aux Lock Upper Gate Strut Arm Springs Main Lock Culvert Valve – RWF Main Lock Floating Mooring Bitt Repairs	Mar 14 – May 20, 2005	Minor Delays
531.5	Markland Locks and Dam (Louisville District)	Structural repairs and maintenance	Jun 4 – Jun 17, 2005	Main Lock Closed
720.7	Cannelton Locks and Dam (Louisville District)	Structural repairs and maintenance	Jul 5 – Aug 6, 2005	Main Lock Closed
776.1	Newburgh Locks and Dam (Louisville District)	Rebuild culvert valves	Apr 18– May 24, 2005	No Closure No Delay
776.1	Newburgh Locks and Dam (Louisville District)	Structural Repairs and Maintenance	Nov 7 – Nov 19, 2005	Main Lock Closed
938.9	Locks and Dam 52 (Louisville District)	Rebuild two beartraps	Sept 6 – Oct 29, 2005	No Closure No Delay

Repair/Maintenance Schedule for 2006**Allegheny River System**

45.7	Lock and Dam 7 (Pittsburgh District)	Replace Land Wall Filling Valve and Renovate Operating Machinery	April 11-21, 2006	Single Chamber Open Intermittent Delays
14.5	C.W. Bill Young L/D (Pittsburgh District)	Replace Land Wall Filling Valve and Renovate Operating Machinery	Nov 13-21, 2006	Single Chamber Open Intermittent Delays

Cumberland River System

30.6	Barkley Lock (Nashville District)	Repairs	July 2006 (3 weeks)	Single Chamber Closed Traffic Can Pass Kentucky Lock
------	--------------------------------------	---------	------------------------	------------------------------------------------------------

Great Lakes and Ohio River Division (continued)

Repair/Maintenance Schedule for 2006 (continued)

<u>River Mile</u>	<u>Project</u>	<u>Repairs</u>	<u>Dates</u>	<u>Remarks</u>
<u>Monongahela River System</u>				
108.0	Hildebrand L/D (Pittsburgh District)	Dewater Single 84' x 600' Chamber Repair Lock Gates and Seals	May 2 - Jun 2, 2006	Single Chamber Closed No Traffic Can Pass Through Lock
23.8	Locks and Dam 3 (Pittsburgh District)	Dewater 56' x 720' Lock Chamber and Renovate Filling Valves	Jun 19 - Jul 17, 2006	Land Chamber Closed Intermittent Delays
23.8	Locks and Dam 3 (Pittsburgh District)	Replace Upstream Lock Gates in River Lock Chamber	Jul 18-20, 2006	River Chamber Closed Intermittent Delays
11.3	Braddock L/D (Pittsburgh District)	Dewater 110' x 720' Chamber, Repair Gates, Sills and Anchorages	Sep 5-24, 2006	Large Chamber Closed Major Delays to Navigation
41.5	Lock and Dam 4 (Pittsburgh District)	Replace Upstream Lock Gates	Dec 5-7, 2006	Single Chamber Closed No Traffic Can Pass Through Lock
<u>Ohio River System</u>				
31.7	Montgomery L/D (Pittsburgh District)	Replace Land Wall Emptying Valve and Renovate Operating Machinery	Feb 27- Mar 8, 2006	Small Chamber Closed Intermittent Delays
13.3	Dashields L/D (Pittsburgh District)	Repair Lock Gate Anchorages in the 110' x 600' Chamber	Mar 20-31, 2006	Large Chamber Closed Major Delays to Navigation
54.3	New Cumberland L/D (Pittsburgh District)	Renovate River Wall Emptying Valve and Renovate Operating Machinery	Oct 17 - Nov 2, 2006	Small Chamber Closed Intermittent Delays
161.7	Willow Island L/D (Huntington District)	Dewater Aux Lock Chamber Mod Upper Gates for Lifting Inspect/Repair Lower gates Dam Tainter Gate Side Seal Repairs	Nov/Dec 2006	No Delays
237.5	Racine L/D (Huntington District)	Dam Tainter Gate Side Seal Repairs	Sep/Nov 2006 (8 weeks)	No Delays
279.2	RC Byrd Locks and Dam (Huntington District)	Aux Lock Culvert Valves	Mar/Apr 2006 (7 weeks)	No Delays
341.0	Greenup L/D (Huntington District)	Main Lock Dewater/Inspect	Jun 2006 (2 weeks)	Main Lock Closed Self-Help
436.2	Meldahl L/D (Huntington District)	Aux Lock Culvert Valve Repairs Dam Tainter gate Side Seal Repairs	May/June 2006 (6 weeks)	No Delays
531.5	Markland Locks and Dam (Louisville District)	Preparation for 1200' lock dewatering closure	July 10 - 12, 2006	Auxiliary Lock Closed
531.5	Markland Locks and Dam (Louisville District)	Structural repairs and maintenance	July 13 - 27, 2006	Main Lock Closed
720.7	Cannelton Locks and Dam (Louisville District)	1200' culvert valve installation	April 10 - 22, 2006	No Closure No Delay
720.7	Cannelton Locks and Dam	Rebuild 1200' lower gate	Sept 11 - Oct 9, 2006	Main Lock Closed
<u>Ohio River System</u>				
776.1	Newburgh Locks and Dam (Louisville District)	Rebuild 600' culvert valves	Apr 24 - May 26, 2006	Auxiliary Lock Closed
938.9	Locks and Dam 52 (Louisville District)	Structural repairs and maintenance	Aug. 9 - 30, 2006	Auxiliary Lock

Tennessee River System

259.4	Wilson L/D (Nashville District)	Repairs to Main Chamber	May 2006 (3 weeks)	Main Lock Closed
22.4	Kentucky Lock (Nashville District)	Repairs	Sep 2006 (3 weeks)	Single Chamber Closed Traffic Can Pass Through Barkley Lock

D - 4

APPENDIX E

BLUE BOOK

THE LAW

Section 7 of the River and Harbor Act of August 8, 1917, provides as follows:

"That it shall be the duty of the Secretary of War to prescribe such regulations for the use, administration, and navigation of the navigable waters of the United States as in his judgment the public necessity may require for the protection of life and property, or of operations of the United States in channel improvement, covering all matters not specifically delegated by law to some other executive department. Such regulations shall be posted, in conspicuous and appropriate places, for the information of the public; and every person and every corporation which shall violate such regulations shall be deemed guilty of a misdemeanor and, on conviction thereof in any district court of the United States within whose territorial jurisdiction such offense may have been committed, shall be punished by a fine not exceeding \$500, or by imprisonment (in the case of a natural person) not exceeding six months, in the discretion of the court."

In pursuance of the law above quoted, the following regulations were prescribed to govern the use, administration, and navigation of the Ohio River, the Mississippi River above Cairo, Ill., and their tributaries.

33 CFR 207.300
[Code of Federal Regulations]
[Title 33, Volume 3, Parts 200 to End]
[Revised as of July 1, 2004]
From the U.S. Government Printing Office via GPO Access
[CITE: 33CFR207.300]

TITLE 33--NAVIGATION AND NAVIGABLE WATERS

PART 207--NAVIGATION REGULATIONS

Sec. 207.300 Ohio River, Mississippi River above Cairo, Ill., and their tributaries; use, administration, and navigation.

(a) *Authority of Lockmasters*

(1) *Locks Staffed with Government Personnel.* The provisions of this paragraph apply to all waterways in this section except for Cordell Hull Lock located at Mile 313.5 on the Cumberland River in Tennessee. The lockmaster shall be charged with the immediate control and management of the lock, and of the area set aside as the lock area, including the lock approach channels. He/she shall see that all laws, rules, and regulations for the use of the lock and lock area are duly complied with, to which end he/she is authorized to give all necessary orders and directions in accordance therewith, both to employees of the government and to any and every person within the limits of the lock and lock area, whether navigating the lock or not. No one shall cause any movement of any vessel, boat, or other floating thing in the lock or approaches except by or under the direction of the lockmaster or his/her assistants. In the event of an emergency, the lockmaster may depart from these regulations, as he deems necessary. The lockmasters shall also be charged with the control and management of federally constructed mooring facilities.

(2) *Locks Staffed with Contract Personnel.* The provisions of this paragraph apply to Cordell Hull Lock located at Mile 313.5 on the Cumberland River in Tennessee. Contract personnel shall give all necessary orders and directions for operation of the lock. No one shall cause any movement of any vessel, boat or other floating thing in the locks or approaches except by or under the direction of the contract lock operator. All duties and responsibilities of the lockmaster set forth in this section shall be performed by the contract lock operator except that responsibility for enforcing all laws, rules, and regulations shall be vested in a government employee designated by the Nashville District Engineer. The district engineer will notify waterway users and the general public through appropriate notices and media concerning the location and identity of the designated government employee.

(b) *Safety Rules for Vessels Using Navigation Locks.* The following safety rules are hereby prescribed for vessels in the locking process, including the act of approaching or departing a lock:

(1) *Tows with Flammable or Hazardous Cargo Barges, Loaded or Empty.*

- (i) Stripping barges or transferring cargo is prohibited.
- (ii) All hatches on barges used to transport flammable or hazardous materials shall be closed and latched, except those barges carrying a gas-free certificate.
- (iii) Spark-proof protective rubbing fenders ("possums") shall be used.

(2) *All Vessels.*

- (i) Leaking vessels may be excluded from locks until they have been repaired to the satisfaction of the lockmaster.
- (ii) Smoking, open flames, and chipping or other spark-producing activities are prohibited on deck during the locking cycle.
- (iii) Painting will not be permitted in the lock chamber during the locking cycle.
- (iv) Tow speeds shall be reduced to a rate of travel such that the tow can be stopped by checking should mechanical difficulties develop. Pilots should check with the individual lockmasters concerning prevailing conditions. It is also recommended that pilots check their ability to reverse their engines prior to beginning an approach. Engines shall not be turned off in the lock until the tow has stopped and been made fast.
- (v) U.S. Coast Guard regulations require all vessels to have on board life saving devices for prevention of drowning. All crew members of vessels required to carry work vests (life jackets) shall wear them during a lockage, except those persons in an area enclosed with a handrail or other device which would reasonably preclude the possibility of falling overboard. All deckhands handling lines during locking procedure shall wear a life jacket. Vessels not required by Coast Guard regulations to have work vests aboard shall have at least the prescribed life saving devices located for ready access and use if needed. The lockmaster may refuse lockage to any vessel which fails to conform to the above.

(c) *Reporting of Navigation Incidents.* In furtherance of increased safety on waterways the following safety rules are hereby prescribed for all navigation interests:

- (1) Any incident resulting in uncontrolled barges shall immediately be reported to the nearest lock. The report shall include information as to the number of loose barges, their cargo, and the time and location where they broke loose. The lockmaster or locks shall be kept informed of

- the progress being made in bringing the barges under control so that he can initiate whatever actions may be warranted.
- (2) Whenever barges are temporarily moored at other than commercial terminals or established fleeting areas, and their breaking away could endanger a lock, the nearest lock shall be so notified, preferably the downstream lock.
- (3) Sunken or sinking barges shall be reported to the nearest lock both downstream and upstream of the location in order that other traffic passing those points may be advised of the hazards.
- (4) In the event of an oil spill, notify the nearest lock downstream, specifying the time and location of the incident, type of oil, amount of spill, and what recovery or controlling measures are being employed.
- (5) Any other activity on the waterways that could conceivably endanger navigation or a navigation structure shall be reported to the nearest lock.

E - 1

(6) Whenever it is necessary to report an incident involving uncontrolled, sunken or sinking barges, the cargo in the barges shall be accurately identified.

(d) *Precedence at Locks.*

- (1) The vessel arriving first at a lock shall normally be first to lock through, but precedence shall be given to vessels belonging to the United States. Licensed commercial passenger vessels operating on a published schedule or regularly operating in the "for hire" trade shall have precedence over cargo tows and like craft. Commercial cargo tows shall have precedence over recreational craft, except as described in paragraph (f) of this section.
- (2) Arrival posts or markers may be established ashore above and/or below the locks. Vessels arriving at or opposite such posts or markers will be considered as having arrived at the locks within the meaning of this paragraph. Precedence may be established visually or by radio communication. The lockmaster may prescribe such departure from the normal order of precedence as in his judgment is warranted to achieve best lock utilization.

(e) *Unnecessary Delay at Locks.* Masters and pilots must use every precaution to prevent unnecessary delay in entering or leaving locks. Vessels failing to enter locks with reasonable promptness when signaled to do so shall lose their turn. Rearranging or switching of barges in the locks or in approaches is prohibited unless approved or directed by the lockmaster. This is not meant to curtail "jackknifing" or set-overs where normally practiced.

(f) *Lockage of Recreational Craft.*

In order to fully utilize the capacity of the lock, the lockage of recreational craft shall be expedited by locking them through with commercial craft: Provided, That both parties agree to joint use of the chamber. When recreational craft are locked simultaneously with commercial tows, the lockmaster will direct, whenever practicable, that the recreational craft enter the lock and depart while the tow is secured in the lock. Recreational craft will not be locked through with vessels carrying volatile cargoes or other substances likely to emit toxic or explosive vapors. If the lockage of recreational craft cannot be accomplished within the time required for three other lockages, a separate lockage of recreational craft shall be made. Recreational craft operators are advised that many locks have a pull chain located at each end of the lock which signals the lockmaster that lockage is desired. Furthermore, many Mississippi River locks utilize a strobe light at the lock to signal recreational type vessels that the lock is ready for entry. Such lights are used exclusively to signal recreational craft.

(g) *Simultaneous Lockage of Tows with Dangerous Cargoes.*

Simultaneous lockage of other tows with tows carrying dangerous cargoes or containing flammable vapors normally will only be permitted when there is agreement between the lockmaster and both vessel masters that the simultaneous lockage can be executed safely. He shall make a separate decision each time such action seems safe and appropriate, provided:

- (1) The first vessel or tow in and the last vessel or tow out are secured before the other enters or leaves.
- (2) Any vessel or tow carrying dangerous cargoes is not leaking.
- (3) All masters involved have agreed to the joint use of the lock chamber.

(h) *Stations While Awaiting a Lockage.* Vessels awaiting their turn to lock shall remain sufficiently clear of the structure to allow unobstructed departure for the vessel leaving the lock. However, to the extent practicable under the prevailing conditions, vessels and tows shall position themselves so as to minimize approach time when signaled to do so.

(i) *Stations While Awaiting Access Through Navigable Pass.* When navigable dams are up or are in the process of being raised or lowered, vessels desiring to use the pass shall wait outside the limits of the approach points unless authorized otherwise by the lockmaster.

(j) *Signals.* Signals from vessels shall ordinarily be by whistle; signals from locks to vessels shall be by whistle, another sound device, or visual means. When a whistle is used, long blasts of the whistle shall not exceed 10 seconds and short blasts of the whistle shall not exceed 3 seconds. Where a lock is not provided with a sound or visual signal installation, the lockmaster will indicate by voice or by the wave of a hand when the vessel may enter or leave the lock. Vessels must approach the locks with caution and shall not enter nor leave the lock until signaled to do so by the lockmaster.

The following lockage signals are prescribed:

(1) *Sound Signals by Means of a Whistle.* These signals apply at either a single lock or twin locks.

(i) Vessels desiring lockage shall on approaching a lock give the following signals at a distance of not more than one mile from the lock:

- (a) If a single lockage only is required: One long blast of the whistle followed by one short blast.
- (b) If a double lockage is required: One long blast of the whistle followed by two short blasts.

(ii) When the lock is ready for entrance, the lock will give the following signals:

- (a) One long blast of the whistle indicates permission to enter the lock chamber in the case of a single lock or to enter the landward chamber in the case of twin locks.
- (b) Two long blasts of the whistle indicates permission to enter the riverward chamber in the case of twin locks.

(iii) Permission to leave the locks will be indicated by the following signals given by the lock:

- (a) One short blast of the whistle indicates permission to leave the lock chamber in the case of a single lock or to leave the landward chamber in the case of twin locks.
- (b) Two short blasts of the whistle indicates permission to leave the riverward chamber in the case of twin locks.

(iv) Four or more short blasts of the lock whistle delivered in rapid succession will be used as a means of attracting attention, to indicate caution, and to signal danger. This signal will be used to attract the attention of the captain and crews of vessels using or approaching the lock or navigating in its vicinity and to indicate that something unusual involving danger or requiring special caution is happening or is about to take place. When this signal is given by the lock, the captains and crews of vessels in the vicinity shall immediately become on the alert to determine the reason for the signal and shall take the necessary steps to cope with the situation.

(2) *Lock signal lights.* At locks where density of traffic or other local conditions make it advisable, the sound signals from the lock will be supplemented by signal lights. Flashing lights (showing a one-second flash followed by a two-second eclipse) will be located on or near each end of the land wall to control use of a single lock or of the landward lock of double locks. In addition, at double locks, interrupted flashing lights (showing a one-second flash, a one-second eclipse and a one-second flash, followed by a three-second eclipse) will be located on or near each end of the intermediate wall to control use of the riverward lock. Navigation will be governed as follows:

(i) *Red Light*. Lock cannot be made ready immediately. Vessel shall stand clear.

(ii) *Amber Light*. Lock is being made ready. Vessel may approach but under full control.

(iii) *Green Light*. Lock is ready for entrance.

(iv) *Green and Amber*. Lock is ready for entrance but gates cannot be recessed completely. Vessel may enter under full control and with extreme caution.

E - 2

(3) *Radio Communications*. VHF-FM radios, operating in the FCC authorized Maritime Band, have been installed at all operational locks (except those on the Kentucky River and Lock 3, Green River). Radio contact may be made by any vessel desiring passage. Commercial tows are especially requested to make contact at least one half hour before arrival in order that the pilot may be informed of current river and traffic conditions that may affect the safe passage of his tow.

(4) All locks monitor 156.8 MHz (Ch. 16) and 156.65 MHz (Ch. 13) and can work 156.65 MHz (Ch. 13) and 156.7 MHz (Ch. 14) Ch. 16 is the authorized call, reply and distress frequency, and locks are not permitted to work on this frequency except in an emergency involving the risk of immediate loss of life or property. Vessels may call and work Ch. 13, without switching, but are cautioned that vessel to lock traffic must not interrupt or delay Bridge to Bridge traffic which has priority at all times.

(k) *Rafts*. Rafts to be locked through shall be moored in such manner as not to obstruct the entrance of the lock, and if to be locked in sections, shall be brought to the lock as directed by the lockmaster. After passing the lock the sections shall be reassembled at such distance beyond the lock as not to interfere with other vessels.

(l) *Entrance to and exit from locks*. In case two or more boats or tows are to enter for the same lockage, their order of entry shall be determined by the lockmaster. Except as directed by the lockmaster, no boat shall pass another in the lock. In no case will boats be permitted to enter or leave the locks until directed to do so by the lockmaster. The sides of all craft passing through any lock shall be free from projections of any kind that might injure the lock walls. All vessels shall be provided with suitable fenders, and shall be used to protect the lock and guide walls until it has cleared the lock and guide walls.

(m) *Mooring*

(1) *At Locks*.

(i) All vessels when in the locks shall be moored as directed by the lockmaster. Vessels shall be moored with bow and stern lines leading in opposite directions to prevent the vessel from "running" in the lock. All vessels will have one additional line available on the head of the tow for emergency use. The pilothouse shall be attended by qualified personnel during the entire locking procedure. When the vessel is securely moored, the pilot shall not cause movement of the propellers except in emergency or unless directed by the lockmaster. Tying to lock ladders is strictly prohibited.

(ii) Mooring of unattended or nonpropelled vessels or small craft at the upper or lower channel approaches will not be permitted within 1200 feet of the lock.

(2) *Outside of locks*.

(i) No vessel or other craft shall regularly or permanently moor in any reach of a navigation channel. The approximate centerline of such channels are marked as the sailing line on Corps of Engineers' navigation charts. Nor shall any floating craft, **except in an emergency**, moor in any narrow or hazardous section of the waterway. Furthermore, all vessels or other craft are prohibited from regularly or permanently mooring in any section of navigable waterways which are congested with commercial facilities or traffic **unless it is moored at facilities approved by the Secretary of the Army or his authorized representative**. The limits of the congested areas shall be marked on Corps of Engineers' navigation charts. However, the District Engineer may authorize in writing exceptions to any of the above if, in his judgment, such mooring would not adversely affect navigation and anchorage.

(ii) No vessel or other craft shall be moored to railroad tracks, to riverbanks in the vicinity of railroad tracks when such mooring threatens the safety of equipment using such tracks, to telephone poles or power poles, or to bridges or similar structures used by the public.

(iii) Except in case of great emergency, no vessel or craft shall anchor over revetted banks of the river, and no floating plant other than launches and similar small craft shall land against banks protected by revetment except at regular commercial landings. In all cases, every precaution to avoid damage to the revetment works shall be exercised. The construction of log rafts along matted or paved banks or the tying up and landing of log rafts against such banks shall be performed in such a manner as to cause no damage to the mattress work or bank paving. Generally, mattress work extends out into the river 600 feet from the low water line.

(iv) Any vessel utilizing a federally constructed mooring facility (e.g., cells, buoys, anchor rings) at the points designated on the current issue of the Corps' navigation charts shall advise the lockmaster at the nearest lock from that point by the most expeditious means.

(n) *Draft of Vessels*. No vessel shall attempt to enter a lock unless its draft is at least three inches less than the least depth of water over the guard sills, or over the gate sills if there be no guard sills. Information concerning controlling depth over sills can be obtained from the lockmaster at each lock or by inquiry at the office of the district engineer of the district in which the lock is located.

(o) *Handling machinery*. No one but employees of the United States shall move any lock machinery except as directed by the lockmaster. Tampering or meddling with the machinery or other parts of the lock is strictly forbidden.

(p) *Refuse in Locks*. Placing or discharging refuse of any description into the lock, on lock walls or esplanade, canal or canal bank is prohibited.

(q) *Damage to locks or other work*. To avoid damage to plant and structures connected with the construction or repair of locks and dams, vessels passing structures in the process of construction or repair shall reduce their speed and navigate with special caution while in the vicinity of such work. The restrictions and admonitions contained in these regulations shall not affect the liability of the owners and operators of floating craft for any damage to locks or other structures caused by the operation of such craft.

(r) *Trespass of lock property*. Trespass on locks or dams or other United States property pertaining to the locks or dams is strictly prohibited except in those areas specifically permitted. Parties committing any injury to the locks or dams or to any part thereof will be responsible therefor. Any person committing a willful injury to any United States property will be prosecuted. No fishing will be permitted from lock walls, guide walls, or guard walls of any

lock or from any dam, except in areas designated and posted by the responsible District Engineer as fishing areas. Personnel from commercial and recreational craft will be allowed on the lock structure for legitimate business reasons; e.g., crew changes, emergency phone calls, etc.

(s) *Restricted areas at locks and dams.* All waters immediately above and below each dam, as posted by the respective District Engineers, are hereby designated as restricted areas. No vessel or other floating craft shall enter any such restricted area at any time. The limits of the restricted areas at each dam will be determined by the responsible District Engineer and marked by signs and/or flashing red lights installed in conspicuous and appropriate places.

(t) [Reserved]

E - 3

(u) *Operations during high water and floods in designated vulnerable areas.* Vessels operating on these waters during periods when river stages exceed the level of "ordinary high water", as designated on Corps of Engineers' navigation charts, shall exercise reasonable care to minimize the effects of their bow waves and propeller washes on river banks; submerged or partially submerged structures or habitations; terrestrial growth such as trees and bushes; and man-made amenities that may be present. Vessels shall operate carefully when passing close to levees and other flood protection works, and shall observe minimum distances from banks, which may be prescribed from time to time in Notices to Navigation Interests. Pilots should exercise particular care not to direct propeller wash at riverbanks, levees, revetments, structures or other appurtenances subject to damage from wave action.

(v) *Navigation lights for use at all locks and dams except on the Kentucky River and Lock 3, Green River.*

(1) At locks at all fixed dams and at locks at all movable dams when the dams are up so that there is no navigable pass through the dam, the following navigation lights will be displayed during hours of darkness:

- (i) Three green lights visible through an arc of 360 degrees arranged in a vertical line on the upstream end of the river (guard) wall unless the intermediate wall extends farther upstream. In the latter case, the lights will be placed on the upstream end of the intermediate wall.
- (ii) Two green lights visible through an arc of 360 degrees arranged in a vertical line on the downstream end of the river (guard) wall unless the intermediate wall extends farther downstream. In the latter case, the lights will be placed on the downstream end of the intermediate wall.
- (iii) A single red light, visible through an arc of 360 degrees on each end (upstream and downstream) of the land (guide) wall.

(2) At movable dams when the dam has been lowered or partly lowered so that there is an unobstructed navigable pass through the dam, the navigation lights indicated in the following paragraphs will be displayed during hours of darkness until lock walls and weir piers are awash.

- (i) Three red lights visible through an arc of 360 degrees arranged in a vertical line on the upstream end of the river (guard) wall.
- (ii) Two red lights visible through an arc of 360 degrees arranged in a vertical line on the downstream end of the river (guard) wall.
- (iii) A single red light visible through an arc of 360 degrees on each end (upstream and downstream) of the land (guide) wall.

(3) After lock walls and weir piers are awash they will be marked as prescribed in paragraph (x) of this section.

(4) If one or more bear traps or weirs are open or partially open, and may cause a set in current conditions at the upper approach to the locks, this fact will be indicated by displaying a white circular disk 5 feet in diameter, on or near the light support on the upstream end of the land (guide) wall during the hours of daylight, and will be indicated during hours of darkness by displaying a white (amber) light vertically under and 5 feet below the red light on the upstream end of the land (guide) wall.

(5) At Locks No. 1 and 2, Green River, when the locks are not in operation because of high river stages, a single red light visible through an arc of 360 degrees will be displayed on each end (upstream and downstream) of the lock river (guard) wall at which time the lights referred to above will not be visible.

(w) *Navigation lights for use at locks and dams on the Kentucky River and Lock 3, Green River.* A single red light visible through an arc of 360 degrees shall be displayed during hours of darkness at each end of the river wall or extending guard structures until these structures are awash.

(x) *Buoys at movable dams.*

(1) Whenever the river (guard) wall of the lock and any portion of the dam are awash, and until covered by a depth of water equal to the project depth, the limits of the navigable pass through the dam will be marked by buoys located at the upstream and downstream ends of the river (guard) wall, and by a single buoy over the end or ends of the portion or portions of the dam adjacent to the navigable pass over which project depth is not available. A red nun-type buoy will be used for such structures located on the left-hand side (facing downstream) of the river and a black can-type buoy for such structures located on the right-hand side. Buoys will be lighted, if practicable.

(2) Where powerhouses or other substantial structures projecting considerably above the level of the lock wall are located on the river (guard) wall, a single red light located on top of one of these structures may be used instead of river wall buoys prescribed above until these structures are awash, after which they will be marked by a buoy of appropriate type and color (red nun or black can buoy) until covered by a depth of water equal to the project depth. Buoys will be lighted, if practicable.

(y) *Vessels to carry regulations.* A copy of these regulations shall be kept at all times on board each vessel regularly engaged in navigating the rivers to which these regulations apply. Copies may be obtained from any lock office or District Engineer's office on request. Masters of such vessels are encouraged to have on board copies of the current edition of appropriate navigation charts.

NOTES

1. Muskingum River Lock & Dam 1 has been removed. Ohio River slackwater provides navigable channel for recreational craft to Lock 2 near Devoia, Ohio. Muskingum River Locks 2 thru 11 inclusive have been transferred to the State of Ohio and are operated during the recreational boating season by the Ohio Department of Natural Resources. Inquiries regarding Muskingum River channel conditions and lock availability should be directed to the aforementioned Department.
2. Little Kanawha River Lock and Dam 1 has been removed, thus permitting recreational craft to navigate up to Lock 2 near Slate, W. Va. Operation of Locks 2 thru 5 on the Little Kanawha River has been discontinued.
3. Big Sandy River: Lock 1 has been removed, thus permitting recreational craft to navigate to Lock 2, near Buchanan, Ky. Operation of Lock 2 and Lock 3 near Fort Gay, W. Va. has been discontinued. Operation of Lock and Dam 1 on Levisa Fork near Gallup, Ky., and Lock and Dam 1 on Tug Fork near Chapman, Ky. has been discontinued.
4. Operation of the following Green River Locks has been discontinued: Lock 4 near Woodbury, Ky., Lock 5 near Glenmore, Ky., and Lock 6 near Brownsville, Ky.

5. Operation of Barren River Lock and Dam No. 1 near Richardsville, Ky. has been discontinued.
6. Operation of Rough River Lock and Dam No. 1 near Hartford, Ky. has been discontinued.
7. Operation of Osage River Lock and Dam 1 near Osage City, Mo., has been discontinued.
8. Operation of the 34 locks in the Illinois and Mississippi (Hennepin) Canal, including the feeder section, has been discontinued.
9. Operation of the Illinois and Michigan Canal has been discontinued.

[40 FR 32121, July 31, 1975, as amended at 50 FR 37580, Sept. 18, 1985;
56 FR 13765, Apr. 4, 1991]

E - 4

APPENDIX F

BLUE BOOK

33 CFR 207.800

[Code of Federal Regulations]
[Title 33, Volume 3, Parts 200 to End]
[Revised as of July 1, 2004]
From the U.S. Government Printing Office via GPO Access
[CITE: 33CFR207.800]

TITLE 33--NAVIGATION AND NAVIGABLE WATERS

PART 207--NAVIGATION REGULATIONS--Table of Contents

Sec. 207.800 Collection of navigation statistics.

(a) *Definitions.* For the purpose of this regulation the following terms are defined:

(1) *Navigable waters of the United States* means those waters of the United States that are subject to the ebb and flow of the tide shoreward to the mean high water mark, and/or are presently used, or have been used in the past, or may be susceptible to use to transport interstate or foreign commerce. (See 33 CFR part 329 for a more complete definition of this term.)

(2) *Offenses and Violations mean:*

- (i) Failure to submit a required report.
- (ii) Failure to provide a timely, accurate, and complete report.
- (iii) Failure to submit monthly listings of idle vessels or vessels in transit.
- (iv) Failure to submit a report required by the lockmaster or canal operator.

(3) *Leased or chartered vessel* means a vessel that is leased or chartered when the owner relinquishes control of the vessel through a contractual agreement with a second party for a specified period of time and/or for a specified remuneration from the lessee. Commercial movements on an affreightment basis are not considered a lease or charter of a particular vessel.

(4) *Person or entity* means an individual, corporation, partnership, or company.

(5) *Timely* means vessel and commodity movement data must be received by the Waterborne Commerce Statistics Center within 30 days after the close of the month in which the vessel movement or nonmovement takes place.

(6) *Commercial vessel* means a vessel used in transporting by water, either merchandise or passengers for compensation or hire, or in the course of business of the owner, lessee, or operator of the vessel.

(7) *Reporting situation* means a vessel movement by an operator that is required to be reported. Typical examples are listed in the instructions on the various ENG Forms. Five typical movements that are required to be reported by vessel operating companies include the following examples: Company A is the barge owner, and the barge transports corn from Minneapolis, MN to New Orleans, LA, with fleeting at Cairo, IL.

(i) *Lease/Charter.* If Company A leases or charters the barge to Company B, then Company B is responsible for reporting the movements of the barge until the lease/charter expires.

(ii) *Interline Movement.* A barge is towed from Minneapolis to Cairo by Company A, and from Cairo to New Orleans by Company B. Since Company A is the barge owner, and the barge is not leased. Company A reports the entire movement of the barge with an origin of Minneapolis and a destination of New Orleans.

(iii) *Vessel Swap/Trade.* Company A swaps barge with Company B to allow Company B to meet a delivery commitment to New Orleans. Since Company A has not leased/chartered the barge, Company A is responsible for filing the report. Company B is responsible for filing the report on the barge which is traded to Company A. The swap or trade will not affect the primary responsibility for reporting the individual vessel movements.

(iv) *Re-Consignment.* Barge is reconsigned to Mobile, AL. Company A reports the movements as originating in Minneapolis and terminating in Mobile. The point from which barge is reconsigned is not reported, only points of loading and unloading.

(v) *Fleeting.* Barge is deposited at a New Orleans fleeting area by Company A and towed by Company B from fleeting area to New Orleans area dock for unloading. Company A, as barge owner, reports entire movements from Minneapolis to the unloading dock in New Orleans. Company B does not report any barge movement.

(b) Implementation of the waterborne commerce statistics provisions of the River and Harbor Act of 1922, as amended by the Water Resources Development Act of 1986 (Pub. L. 99-662), mandates the following.

(1) *Filing Requirements.* Except as provided in paragraph (b)(2) of this section, the person or entity receiving remuneration for the movement of vessels or for the transportation of goods or passengers on the navigable waters is responsible for assuring that the activity report of commercial vessels is timely filed.

(i) For vessels under lease/charter agreements, the lessee or charterer of any commercial vessel engaged in commercial transportation will be responsible for the filing of said reports until the lease/charter expires.

(ii) The vessel owner, or his designated agent, is always the responsible party for ensuring that all commercial activity of the vessel is timely reported.

(2) The following Vessel Information Reports are to be filed with the Army Corps of Engineers, at the address specified on the ENG Form, and are to include:

(i) Monthly Reports. These reports shall be made on ENG Forms furnished upon written request of the vessel operating companies to the Army Corps of Engineers. The forms are available at the following address:

U.S. Army Corps of Engineers, Waterborne Commerce Statistics Center, Post Office Box 61280, New Orleans, Louisiana 70161-1280.

(A) All movements of domestic waterborne commercial vessels shall be reported, including but not limited to: Dry cargo ship and tanker moves, loaded and empty barge moves, towboat moves, with or without barges in tow, fishing vessels, movements of crew boats and supply boats to offshore locations, tugboat moves and movements of newly constructed vessels from the shipyard to the point of delivery.

(B) Vessels idle during the month must also be reported.

F1

(C) Notwithstanding the above requirements, the following waterborne vessel movements need not be reported:

(1) Movements of recreational vessels.

(2) Movements of fire, police, and patrol vessels.

(3) Movements of vessels exclusively engaged in construction (e.g., piledrivers and crane barges). Note: however, that movements off supplies, materials, and crews to or from the construction site must be timely reported.

(4) Movements of dredges to or from the dredging site. However, vessel movements of dredged material from the dredging site to the disposal site must be reported.

(5) Specific movements granted exemption in writing by the Waterborne Commerce Statistics Center.

(D) ENG Forms 3925 and 3925b shall be completed and filed by vessel operating companies each month for all voyages or vessel movements completed during the month. Vessels that did not complete a move during the month shall be reported as idle or in transit.

(E) The vessel operating company may request a waiver from the Army Corps of Engineers, and upon written approval by the Waterborne Commerce Center, the company may be allowed to provide the requisite information of the above paragraph (D), on computer printouts, magnetic tape, diskettes, or alternate medium approved by the Center.

(F) Harbor Maintenance Tax information is required on ENG Form 3925 for cargo movements into or out of ports that are subject to the provisions of section 1402 of the Water Resources Development Act of 1986 (Pub. L. 99-662).

(1) The name of the shipper of the commodity, and the shipper's Internal Revenue Service number or Social Security number, must be reported on the form.

(2) If a specific exemption applies to the shipper, the shipper should list the appropriate exemption code. The specific exemption codes are listed in the directions for ENG Form 3925.

(3) Refer to 19 CFR part 24 for detailed information on exemptions and ports subject to the Harbor Maintenance Tax.

(ii) Annual Reports. Annually an inventory of vessels available for commercial carriage of domestic commerce and vessel characteristics must be filed on ENG Forms 3931 and 3932.

(iii) Transaction Reports. The sale, charter, or lease of vessels to other companies must also be reported to assure that proper decisions are made regarding each company's duty for reporting vessel movements during the year. In the absence of notification of the transaction, the former company of record remains responsible until proper notice is received by the Corps.

(iv) Reports to Lockmasters and Canal Operators. Masters of self-propelled non-recreational vessels which pass through locks and canals operated by the Army Corps of Engineers will provide the data specified on ENG Forms 3102b, 3102c, and/or 3102d to the lockmaster, canal operator, or his designated representative in the manner and detail dictated.

(c) *Penalties for Noncompliance.* The following penalties for noncompliance can be assessed for offenses and violations.

(1) Criminal Penalties. Every person or persons violating the provisions of this regulation shall, for each and every offenses, be liable to a fine of not more than \$5,000, or imprisonment not exceeding two months, to be enforced in any district court in the United States within whose territorial jurisdiction such offense may have been committed.

(2) Civil Penalties. In addition, any person or entity that fails to provide timely, accurate, and complete statements or reports required to be submitted by this regulation may also be assessed a civil penalty of up to \$2,500 per violation under 33 U.S.C. 555, as amended.

(3) Denial of Passage. In addition to these fines, penalties, and imprisonment, the lockmaster or canal operator can refuse to allow vessel passage.

(d) *Enforcement Policy.* Every means at the disposal of the Army Corps of Engineers will be utilized to monitor and enforce these regulations.

(1) To identify vessel-operating companies that should be reporting waterborne commerce data, The Corps will make use of, but is not limited to, the following sources.

(i) Data on purchase and sale of vessels.

(ii) U.S. Coast Guard vessel documentation and reports.

(iii) Data collected at Locks, Canals, and other facilities operated by the Corps.

(iv) Data provided by terminals on ENG Form 3926.

(v) Data provided by the other Federal agencies including the Internal Revenue Service, Customs Service, Maritime Administration, Department of Transportation, and Department of Commerce.

(vi) Data provided by ports, local facilities, and State or local governments.

(vii) Data from trade journals and publications.

(viii) Site visits and inspections.

(2) Notice of Violation. Once a reporting violation is determined to have occurred, the Chief of the Waterborne Commerce Statistics Center will notify the responsible party and allow 30 days for the reports to be filed after the fact. If the reports are not filed within this 30-day notice period, then appropriate civil or criminal actions will be undertaken by the Army Corps of Engineers, including the proposal of civil or criminal penalties for noncompliance. Typical cases for criminal or civil action include, but are not limited to, those violations, which are willful, repeated, or have a substantial impact in the opinion of the Chief of the Waterborne Commerce Statistics Center.

(3) Administrative Assessment of Civil Penalties. Civil penalties may be assessed in the following manner.

(i) Authorization. If the Chief of the Waterborne Commerce Statistics Center finds that a person or entity has failed to comply with any of the provisions specified herein, he is authorized to assess a civil penalty in accordance with the Class I penalty provisions of 33 CFR part 326. Provided, however, that the procedures in 33 CFR part 326 specifically implementing the Clean Water Act (33 U.S.C. 1319(g)(4)), public notice, comment period, and state coordination, shall not apply.

(ii) Initiation. The Chief of the Waterborne Commerce Statistics Center will prepare and process a proposed civil penalty order which shall state the amount of the penalty to be assessed, describe by reasonable specificity the nature of the violation, and indicate the applicable provisions of 3 CFR part 326.



(iii) Hearing Requests. Recipients of a proposed civil penalty order may file a written request for a hearing or other proceeding. This request shall be as specified in 33 CFR part 326 and shall be addressed to the Director of the Water Resources Support Center, Casey Building, Fort Belvoir, Virginia 22060-5586, who will provide the requesting person or entity with a reasonable opportunity to present evidence regarding the issuance, modification, or revocation of the proposed order. Thereafter, the Director of the Water Resources Center shall issue a final order.

(4) Additional Remedies. Appropriate cases may also be referred to the local U.S. Attorney for prosecution, penalty collection, injunctive, and other relief by the Chief of the Waterborne Commerce Statistics Center.



[56 FR 13765, Apr. 4, 1991]

RECOMMENDED LOCKING CONFIGURATIONS



SETOVER (UNIT TOW)

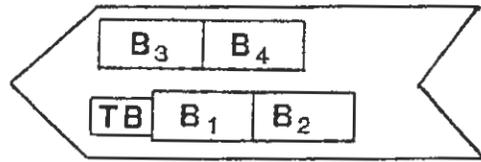



SETOVER (7 BARGE TOW & WIDE BOAT)

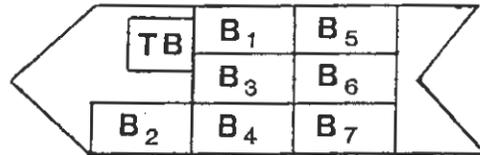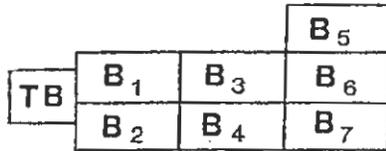

KNOCKOUT

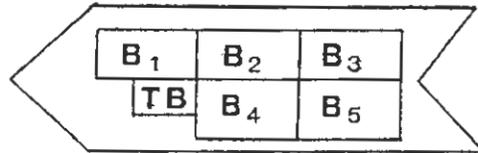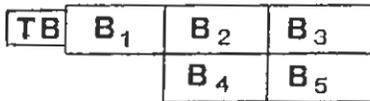

JACKKNIFE

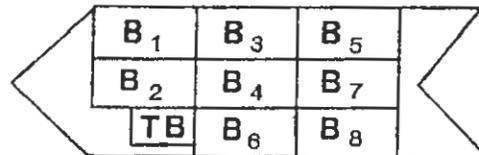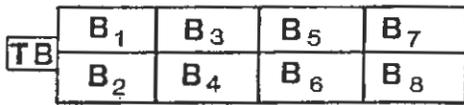

KEY

