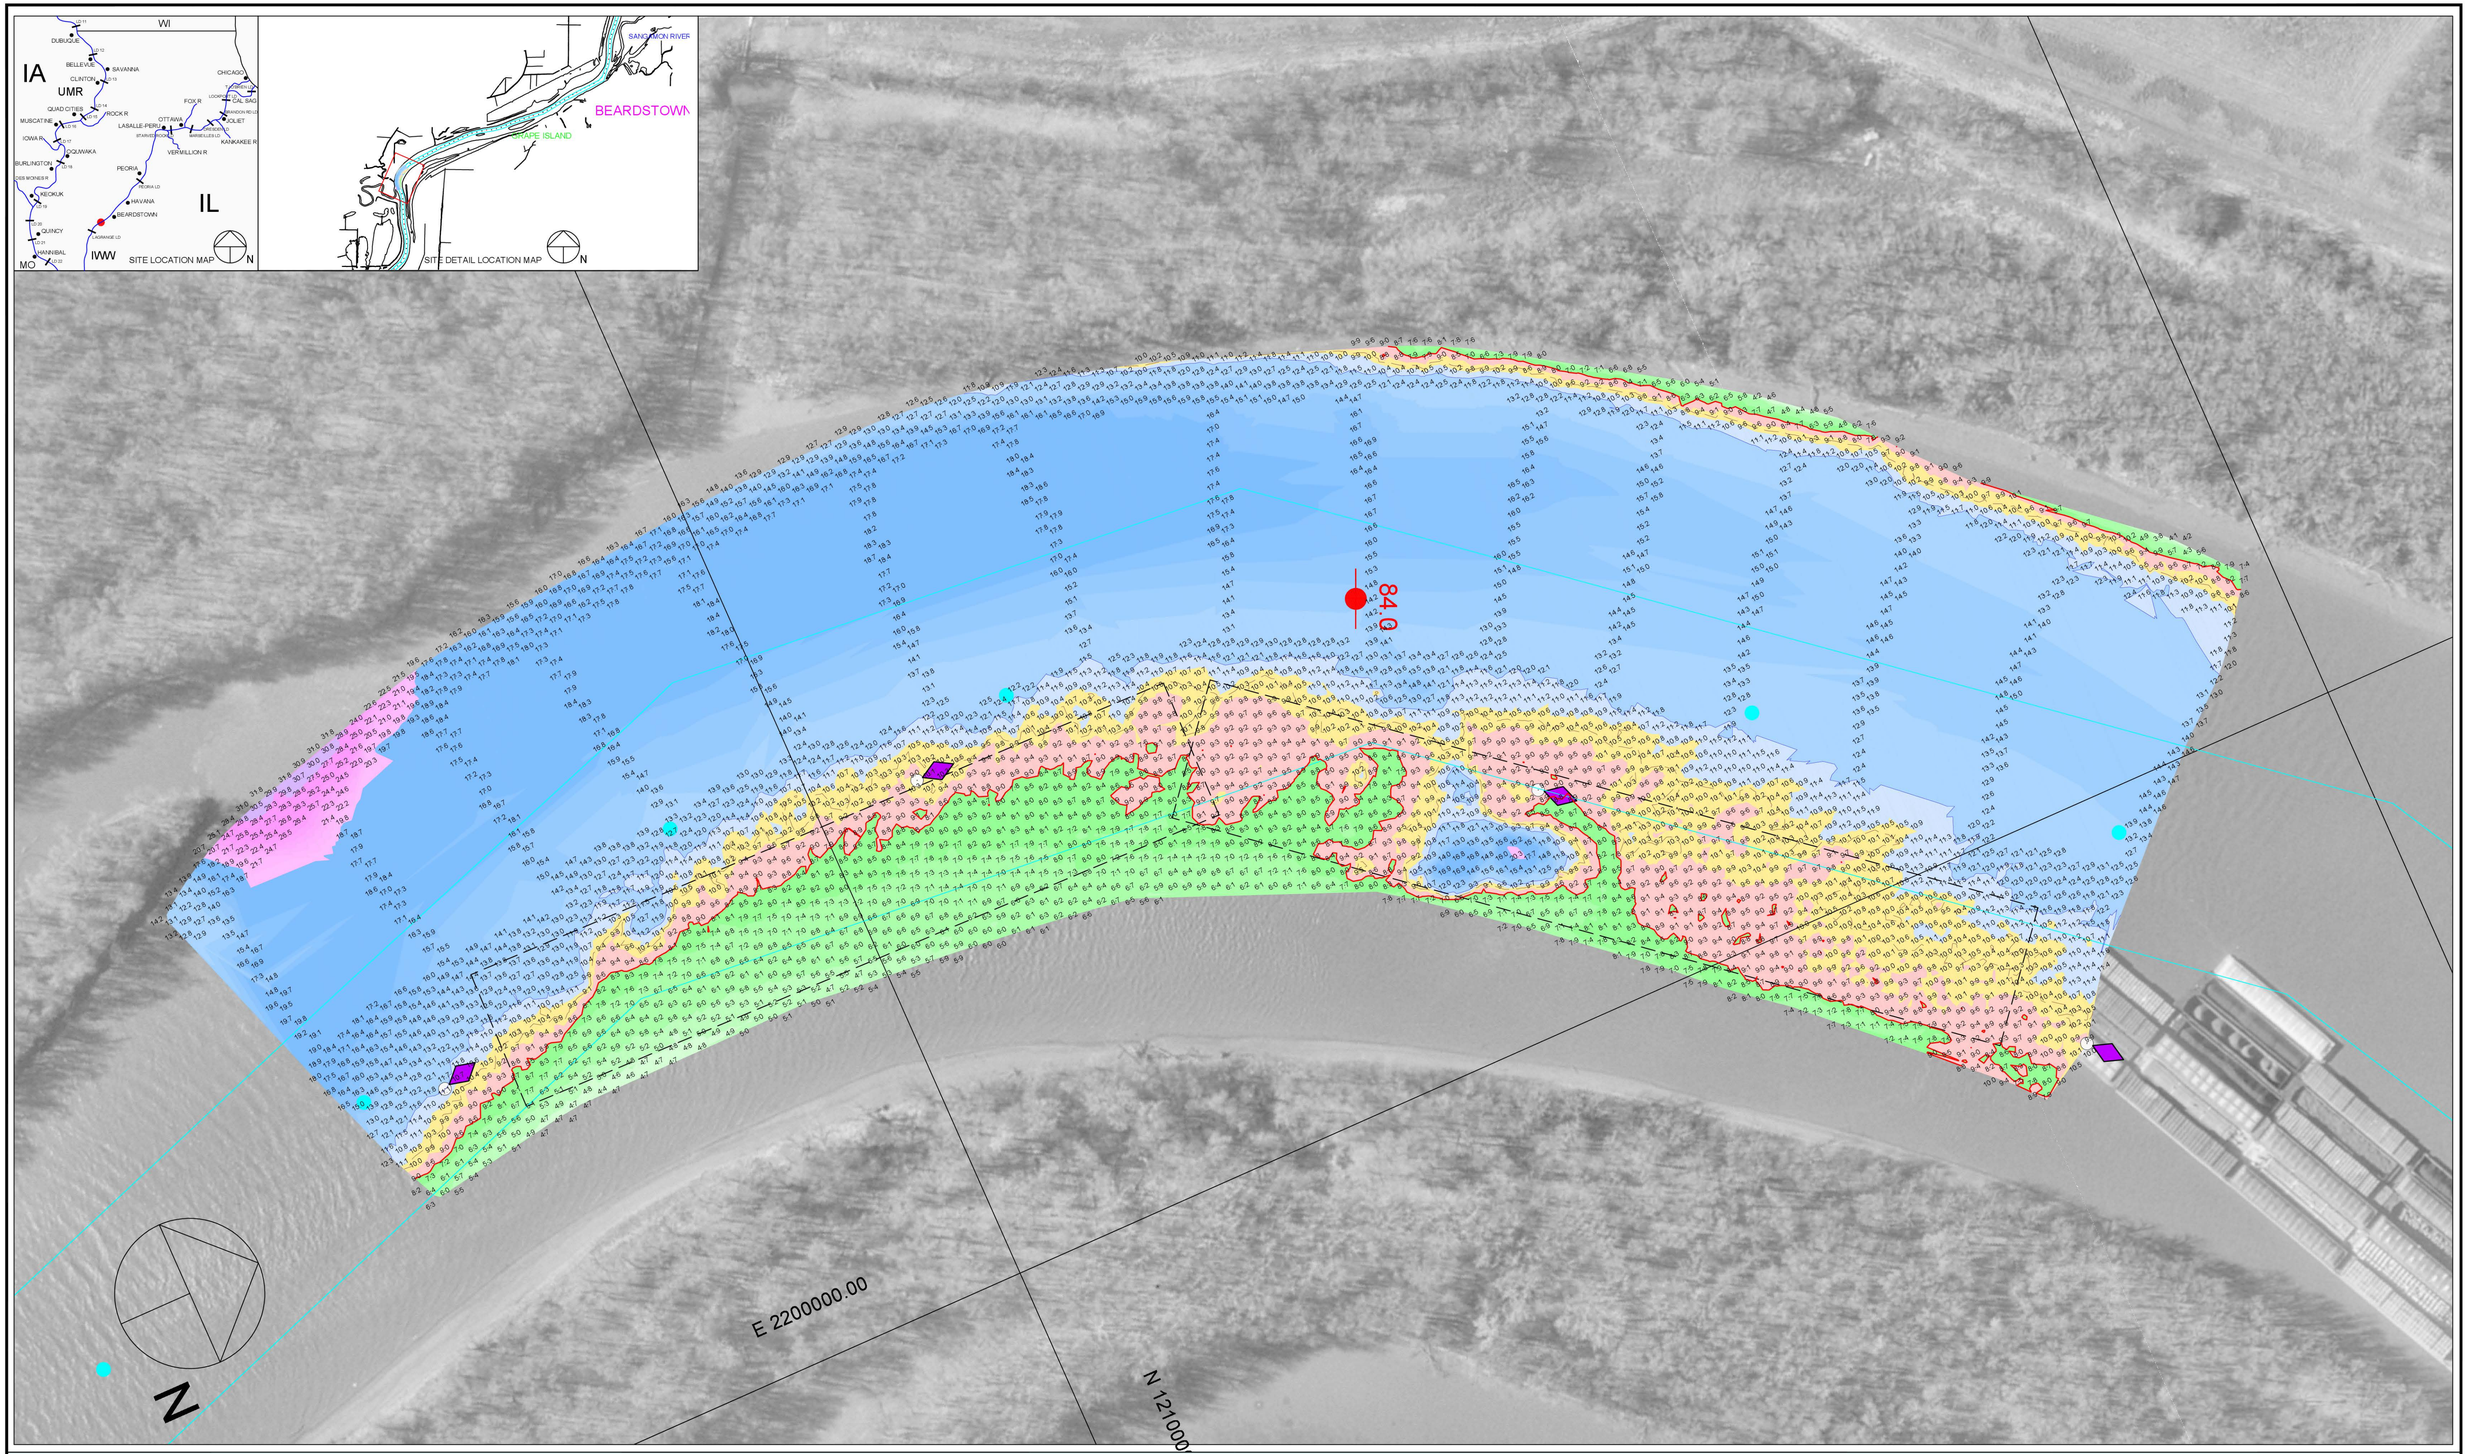

100 0 100 200 300

Scale 1" = 100'

Multi-Transducer Survey with Complete Coverage

Channel Contour Color Fill Legend

-10' - -1' | 0' - 8' | 9' | 10' | 11' - 19' | 20' - 29' | 30' - 50'

Location	Stage		Flat Pool
Morris	4.3	=	482.8
LaSalle	10.2	=	440.2
Peoria	11.6	=	440.0
Havana	4.8	=	429.2
Beardstown	9.1	=	429.0

Hydrographic Survey of the Illinois Waterway Ortho photography flown 1995

Horizontal Projection: State Plane, NAD1983, Illinois West - 1202 U.S. Survey Feet

Vertical Datum: NGVD 1929 U.S. Survey Feet. All soundings adjusted to Flat Pool: 429.0

Water Surface at time of survey: 429.2 / Water Stage: +0.2 Feet

Survey Vessel: MV Holling

Conducted by: Justin Coldwater and Rick Anderson

Processed in AutoCAD Civil 3D 2012 by Bob Adams on 19 Oct 2012

File Name: IWW_LA_0837-0842_12A.dwg

US ARMY CORPS OF ENGINEERS
MVR-ROCK ISLAND DISTRICT
OPERATIONS DIVISION - TECH SUPPORT BRANCH

DEPICTS 2009 DREDGE EVENT

LaMoine River

Survey Date: 17 Oct 2012

IWW / LaGrange Pool - Reach River Miles: 83.7 - 84.2

I/LA