

# **Attachment 2**

Nav. Study Public Meeting Presentation

26<sup>th</sup> Meeting of the NECC  
July 20, 1999

Presented by

Gary Loss, P.E.

Project Manager for Nav. Study  
US Army Corps of Engineers – Rock Island District

### What We Have Learned?

- **Environmental**
  - Collection of New and Existing Data
  - Developed Tools for System Evaluation
- **Economics**
  - Improved System Model
- **Engineering**
  - Identified Lower Cost Construction Methods
- **Public Input**
  - Much Concern Over the Future of Our Rivers





DRAFT  
26th NECC July 20, 1999

Slide 7 of 49

### Remaining Measures

- 1,200 Foot Locks
- 1,200 Foot Guidewall Extensions With Powered Kevels
- Mooring Buoys/cells






DRAFT  
26th NECC July 20, 1999

Slide 8 of 49

### Extension of Existing Lock



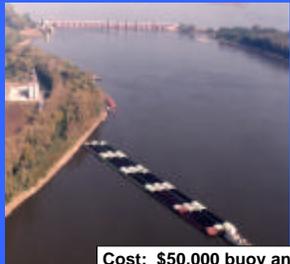
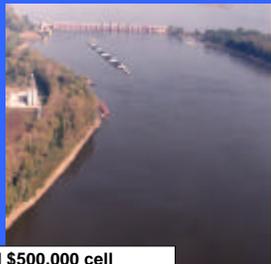

*Existing*      **Cost: \$95-125 Mil/lock**  
**Benefit: Lockage Time Reduced Roughly 50%**      *With Lock Extension*

### Extension of Guidewalls




*Existing*      **Cost: \$30-\$40 Mil/Lock**  
**Benefit: Lockage Time Reduced 20-25%**      *With Guidewall Extension*

### Adjacent Moorings

*Existing*      **Cost: \$50,000 buoy and \$500,000 cell**  
**Benefit: Lockage Time Reduced 5-15%**      *With Mooring Buoy*

### Alternatives Under Consideration

- Alternative Plans - Combinations of the 3 Remaining Measures
- System Traffic Leads to Grouping of Improvements





DRAFT  
26th NECC July 20, 1999

Slide 12 of 49



### Matrix of Alternatives (Costs in \$1,000s)

Alternative Plan	Date in Place	Total Costs	Annual Costs	Annual Benefits	Annual Net Benefits
No Action	-	-	-	-	-
A Mooring Buoys/Cells (Locks 12,18,20,22,24)	2004	\$700	\$200	\$1,800	\$1,600
B 1200' Guidewalls (Locks 20-25) and Mooring Buoys/Cells (Locks 12,18,20,22,24)	2008	\$190,000	\$24,800	\$37,700	\$12,900
C 1200' Locks (20-25)	2013	\$542,000	\$46,900	\$54,600	\$7,700
D 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18)	2013	\$705,000	\$63,000	\$74,900	\$11,900
E 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18) Mooring Buoys/Cells (Locks 12,18,20,22,24)	2013	\$706,000	\$63,200	\$78,500	\$15,300
F 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18, Peoria, LaGrange) Mooring Buoys/Cells (Locks 12,18,20,22,24)	2013	\$765,000	\$68,800	\$84,100	\$15,300
G 1200' Locks (14-18 and 20-25)	2017	\$1,077,000	\$83,700	\$91,200	\$7,500
H 1200' Locks (20-25, Peoria, LaGrange) and 1200' Guidewalls (Locks 14-18)	2015	\$1,066,000	\$89,500	\$93,300	\$3,800

DRAFT  
26th NECC July 20, 1999

### No Action



- Without Project Condition (Assumes No Improvements Made As a Result of Study)
  - Traffic Continues to Increase Somewhat
  - Delays Continue to Grow
  - System Is Unable to Transport Much of Projected Additional Demand

DRAFT  
26th NECC July 20, 1999

### Alternative Plan A

- Mooring Buoys/Cells (Locks 12,18,20,22,24)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2004	\$700	200	1,800	1,600

For the year 2030	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. A	0.0	0.1	0.1	0.0	0.0
Site Specific Habitat Replacement	\$0	\$0	\$0	\$0	\$0

DRAFT  
26th NECC July 20, 1999

### Alternative Plan B

- 1,200' Guidewalls (Locks 20 - 25)
- Mooring Buoys/Cells (Locks 12,18,20,22,24)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2008	\$190,000	24,800	37,700	12,900

For the year 2030	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. B	0.8	1.4	1.8	1.9	0.0
Site Specific Habitat Replacement	\$0	\$0	\$925	\$560	\$0

DRAFT  
26th NECC July 20, 1999

### Alternative Plan C

- 1,200' Locks (Locks 20 - 25)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2013	\$542,000	46,900	54,600	7,700

For the year 2030	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. C	1.2	1.9	2.9	3.0	0.0
Site Specific Habitat Replacement	\$0	\$0	\$2,715	\$635	\$0

DRAFT  
26th NECC July 20, 1999

### Alternative Plan D

- 1,200' Locks (Locks 20 - 25)
- 1,200' Guidewalls (Locks 14-18)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2013	\$705,000	63,000	74,900	11,900

For the year 2030	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. D	1.9	3.4	4.3	4.5	0.0
Site Specific Habitat Replacement	\$0	\$70	\$2,715	\$635	\$0

DRAFT  
26th NECC July 20, 1999

### Alternative Plan E

- 1,200' Locks (Locks 20 - 25)
- 1,200' Guidewalls (Locks 14-18)
- Mooring Buoys/Cells (Locks 12,18,20,22,24)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2013	\$706,000	63,200	78,500	15,300

	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
For the year 2030	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. E	1.9	3.5	4.4	4.6	0.0
Site Specific Habitat Replacement	\$0	\$70	\$2,715	\$635	\$0

DRAFT  
26th NECC July 26, 1999

Slide 25 of 49

### Alternative Plan F

- 1,200' Locks (Locks 20 - 25)
- 1,200' Guidewalls (Locks 14 - 18, LaGrange, Peoria)
- Mooring Buoys/Cells (Locks 12,18,20,22,24)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2013	\$765,000	68,800	84,100	15,300

	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
For the year 2030	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. F	1.9	3.5	4.4	4.6	0.4
Site Specific Habitat Replacement	\$0	\$70	\$2,715	\$635	\$280

DRAFT  
26th NECC July 20, 1999

Slide 26 of 49

### Alternative Plan G

- 1,200' Locks (Locks 14-18 and 20-25)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2017	\$1,077,000	83,700	91,200	7,500

	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
For the year 2030	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. G	2.8	4.8	5.5	5.6	0.0
Site Specific Habitat Replacement	\$0	\$600	\$2,715	\$635	\$0

DRAFT  
26th NECC July 26, 1999

Slide 27 of 49

### Alternative Plan H

- 1,200' Locks (Locks 20 - 25, Peoria, LaGrange)
- 1,200' Guidewalls (Locks 14-18)



Earliest Date in Place	Total Cost	(Costs in \$1,000s)		
		Annual Cost	Annual Benefits	Ann Net Benefits
2015	\$1,066,000	89,500	93,300	3,800

	LaCrosse, WI	Rock Island, IL	Quincy, IL	Winfield, MO	Peoria, IL
For the year 2030	L/D 8	L/D 15	L/D21	L/D 25	Peoria
Avg tows/day without project	5.8	11.8	14.4	14.8	14.8
Avg added tows/day with Alt. H	1.9	3.4	4.3	4.5	0.5
Site Specific Habitat Replacement	\$0	\$70	\$2,715	\$635	\$645

DRAFT  
26th NECC July 20, 1999

Slide 28 of 49

### Matrix of Alternatives (Costs in \$1,000s)

Alternative Plan	Date in Place	Total Costs	Annual Costs	Annual Benefits	Annual Net Benefits
No Action	-	-	-	-	-
A Mooring Buoys/Cells (Locks 12,18,20,22,24)	2004	\$700	\$200	\$1,800	\$1,600
B 1200' Guidewalls (Locks 20-25) and Mooring Buoys/Cells (Locks 12,18,20,22,24)	2008	\$190,000	\$24,800	\$37,700	\$12,900
C 1200' Locks (20-25)	2013	\$542,000	\$46,900	\$54,600	\$7,700
D 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18)	2013	\$705,000	\$63,000	\$74,900	\$11,900
E 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18) Mooring Buoys/Cells (Locks 12,18,20,22,24)	2013	\$706,000	\$63,200	\$78,500	\$15,300
F 1200' Locks (20-25) and 1200' Guidewalls (Locks 14-18, Peoria, LaGrange) Mooring Buoys/Cells (Locks 12,18,20,22,24)	2013	\$765,000	\$68,800	\$84,100	\$15,300
G 1200' Locks (14-18 and 20-25)	2017	\$1,077,000	\$83,700	\$91,200	\$7,500
H 1200' Locks (20-25, Peoria, LaGrange) and 1200' Guidewalls (Locks 14-18)	2015	\$1,066,000	\$89,500	\$93,300	\$3,800

DRAFT  
26th NECC July 26, 1999

Slide 29 of 49

### Regional Economic Analysis



Total Construction Impacts  
Employment Man-Yrs

	Alt B	Alt E	Alt H
Illinois	1,319	4,897	7,310
Iowa	59	1,213	1,266
Minnesota	70	336	408
Missouri	1,256	3,698	3,783
Wisconsin	105	412	540
Total US	5,163	19,282	24,240

DRAFT  
26th NECC July 20, 1999

Slide 30 of 49

## Regional Economic Analysis

Annual Transportation Savings Impacts  
Employment Man-Yrs

	Alt B	Alt E	Alt H
Illinois	302	708	885
Iowa	104	247	282
Minnesota	136	321	369
Missouri	122	282	340
Wisconsin	26	62	75
Total US	2,036	4,786	5,606

DRAFT  
26th NECC July 20, 1999

Slide 31 of 49

## Environmental Impacts

- Site Specific Impacts
- Cumulative Effects
- System Impacts

DRAFT  
26th NECC July 20, 1999

Slide 32 of 49

## Site-Specific Impacts

DRAFT  
26th NECC July 20, 1999

Slide 33 of 49

## Site Specific Impacts of Lock Extensions (Costs in \$1,000s)

Habitat Impacts	Lock 21	Lock 25	Peoria
Bottomland Forest	\$2,500 – \$5,400	\$285	\$505
Main Channel Border	\$70	\$350	\$140

Resource Impacts	Lock 21	Lock 25	Peoria
Mussels	Potential beds right bank upstream and downstream	Mussel bed is avoidable	No known concentration
Threatened and Endangered Species	Bald eagle, Indiana Bat	Potentially avoid impacts	Indiana Bat, Decurrent false aster

DRAFT  
26th NECC July 20, 1999

Slide 34 of 49

## Cumulative Impacts

Historical Changes  
Mississippi River - Pool 18  
Post-Dam - 1989

Projected Changes  
Mississippi River - Pool 18  
1989 - 2050

DRAFT  
26th NECC July 20, 1999

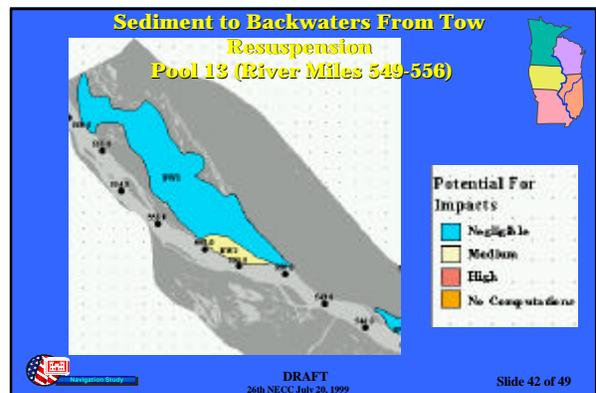
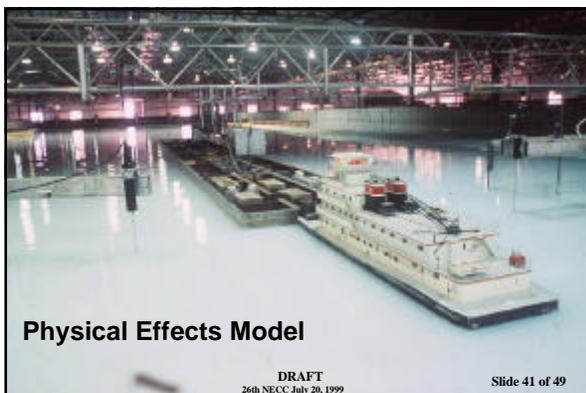
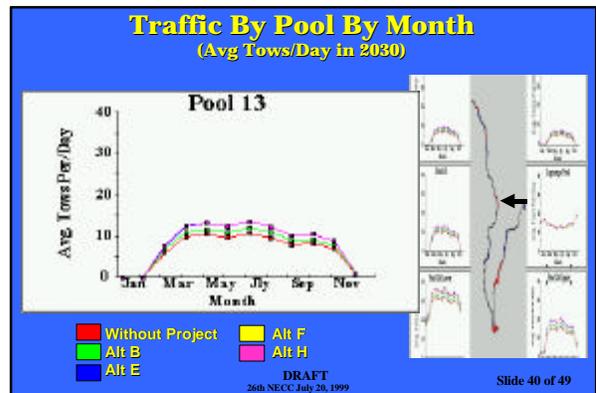
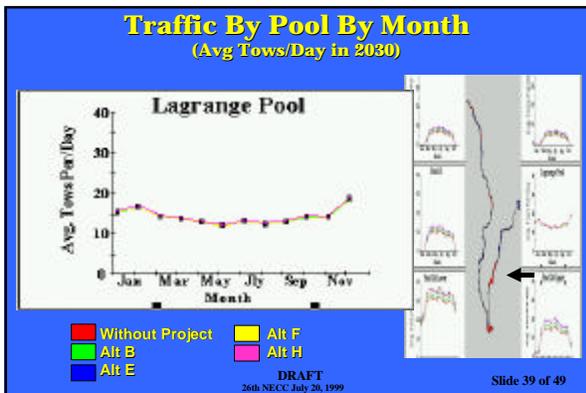
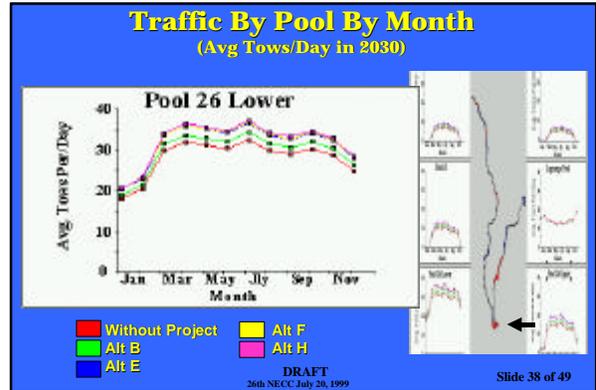
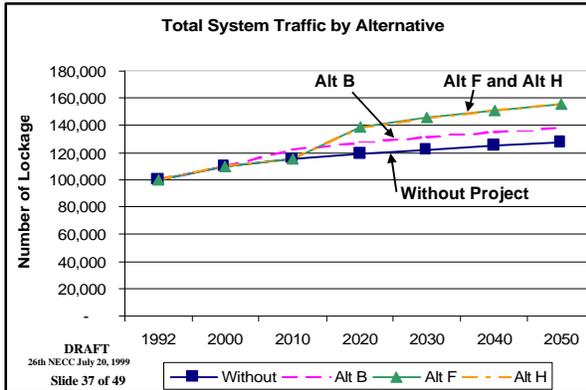
Slide 35 of 49

## System Impacts

- Fish
- Plants
- Mussels
- Bank Erosion
- Backwater Sediment

DRAFT  
26th NECC July 20, 1999

Slide 36 of 49



### Impacts to Fish Pool 13 - Alternative F (Percent Change in Larval Fish Mortality)

- Freshwater drum 2.4
- Emerald shiner 2.3
- Gizzard shad 2.2
- Channel catfish 2.0
- Walleye 1.9
- Mooneye 0.3



DRAFT  
26th NECC July 20, 1999

Slide 43 of 49

### Direct Effects Studies Aquatic Plants




DRAFT  
26th NECC July 20, 1999

Slide 44 of 49

### Impacts to Aquatic Plants Pool 13 - Alternative F (Percent Reduction in Growth)

- Wild Celery 0-12%
- Sago Pondweed 0-4%




DRAFT  
26th NECC July 20, 1999

Slide 45 of 49

### Impacts to Mussels



- No direct mortality due to tow passage
- Further investigation on:
  - Growth
  - Reproduction

DRAFT  
26th NECC July 20, 1999

Slide 46 of 49

### What's Next

- Adding Public Input to the Plan Formulation Process
- Completing the System Environmental Analysis
- Identifying the National Economic Development (NED) Plan and Initial Recommended Plan



DRAFT  
26th NECC July 20, 1999

Slide 47 of 49

### Study Schedule

- Initial Recommended Plan is scheduled for release this Fall
- Draft Report is scheduled for release in June 2000
- Public Meetings on Draft Report and Draft Environmental Impact Statement in Summer 2000
- Final Report to Washington Dec 2000



DRAFT  
26th NECC July 20, 1999

Slide 48 of 49

**For More Information**



- **Toll Free Telephone Number:**  
800/872-8822
- **Newsletters**
- **Internet Homepage Address:**  
[www.mvr.usace.army.mil/pdw/nav\\_study](http://www.mvr.usace.army.mil/pdw/nav_study)



**DRAFT**  
26th NECC July 20, 1999

Slide 49 of 49