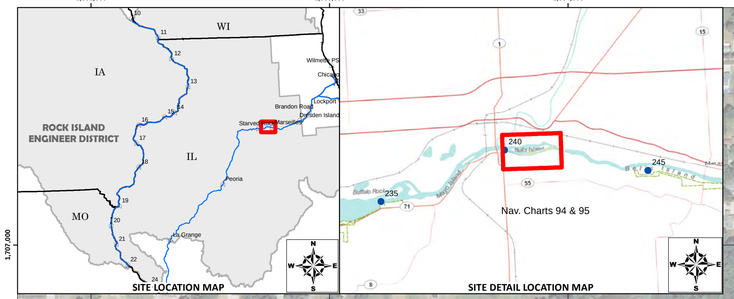

OTTAWA UPPER LT. (240.0)

BULLS ISLAND BEND LT. (241.5)

BULLS ISLAND FERRY LT. (240.6)

Scherer Island

Bulls Island

FLOW

240

241

2,662,000 2,663,000 2,664,000 2,665,000 2,666,000 2,667,000 2,668,000 2,669,000 2,670,000 2,671,000

1,707,000 1,706,000 1,705,000 1,704,000 1,703,000 1,702,000

0 150 300 600 900 1,200 Feet

1 " = 300 '

Multi -Transducer Survey with 100' Intervals

Channel Contour Color Fill Legend

-10' 0' 9' 10' 11' 12' 20' 30' 50'

N W E S

Hydrographic Survey of the **Illinoisi River** Orthophotography flown 2012

Horizontal Projection: State Plane, NAD 1983, Illinois West - 1202, U.S. Survey Feet

Vertical Datum: NGVD 29 U.S. Survey Feet. All soundings adjusted to Flat Pool: 458.5

Water Surface at time of survey: 458.9 / Water Stage: +0.4 Feet

Survey Vessel: Launch Coot

Conducted by: Sam Hoover

Processed in ArcGIS by: John Hayes 15 AUG 2013

File Name: MVRIWSR_24012417_13A

US ARMY CORPS OF ENGINEERS
MVR-ROCK ISLAND DISTRICT
OPERATIONS DIVISION - TECH SUPPORT BRANCH

Bulls Island Upper

Survey Date: 14 AUG 2013

IWW / Starved Rock Pool - Reach River Miles: 240.1 - 241.7