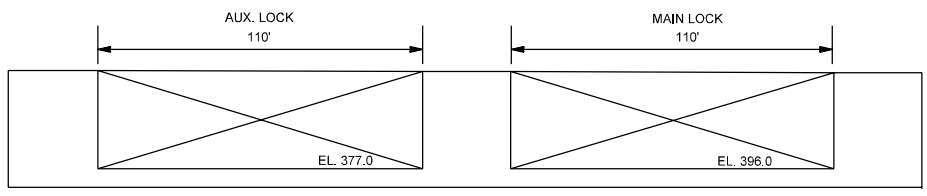

LOCK AND DAM NO. 26 (MELVIN PRICE)

HORIZONTAL CLEARANCE 110.0'
LENGTH OF LOCK 1200.0' MAIN
600.0' AUXILIARY

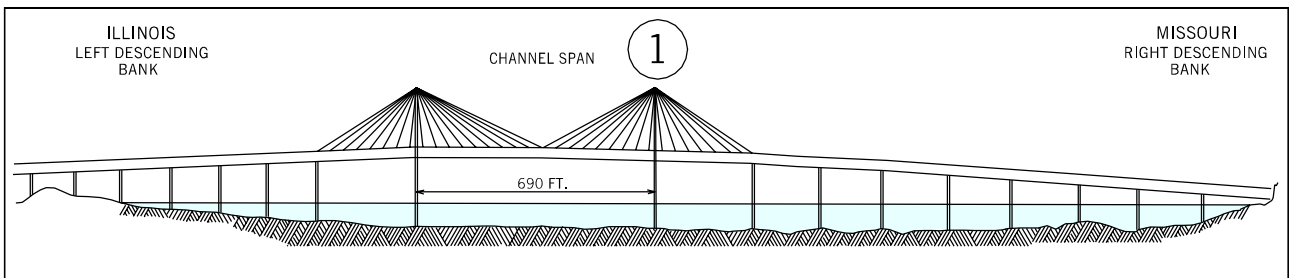

VERTICAL CLEARANCE = 485.4 FEET MINUS
MEL PRICE L&D UPPER GAGE

NOT TO SCALE
VIEW FROM UP STREAM

NEW CLARK HIGHWAY BRIDGE
UPPER MISSISSIPPI RIVER MILE 202.4
CLEARANCE DATA

FACILITIES

1 *Continental Oil Co. Dock*
2 *Wood River Pipeline Co. Dock*
3 *Phoenix Terminal Co. Dock*
4 *National Marine Service Dock*
5 *Clark Oil Co. Dock*
6 *Shell Oil Co. Dock*
7 *Mike's Inc.*
8 *Economy Boat Store Dock*
9 *Amoco Oil Co. Dock*
10 *Standard Oil Co. Dock*
11 *American Commercial Marine Service Co. Dock*
12 *Illinois Power Plant and Dock*
13 *Alton Barge Terminal*

UTILITY CROSSING

MILES	*DESCRIPTION*	*VERTICAL CLEARANCE ft. above flat pool-or- (ELEV., FT. NGVD)*	*OWNER*
196.1	*PIPELINE*	*N/A*	*WOOD RIVER PIPELINE CO.*
196.1	*PIPELINE*	*N/A*	*KOCH PIPELINE CO.*
196.2	*PIPELINE*	*N/A*	*CONTINENTAL PIPELINE CO.*
196.2	*PIPELINE*	*N/A*	*EXPLORER PIPELINE CO.*
196.6	*AERIAL*	*N/A*	*AMEREN UE ELECTRIC CO.*
196.7	*PIPELINE*	*N/A*	*PLATTIE PIPELINE CO.*
196.8	*PIPELINE*	*N/A*	*PLATTIE PIPELINE CO.*
197.0	*PIPELINE*	*N/A*	*SHELL PIPELINE CO.*
197.4	*PIPELINE*	*N/A*	*SHELL PIPELINE CO.*
197.5	*PIPELINE*	*N/A*	*CONTINENTAL PIPELINE CO.*
197.8	*PIPELINE*	*N/A*	*WILLIAMS / ARCO PIPELINE CO.*
197.8	*PIPELINE*	*N/A*	*CONOCO OIL CO.*
197.8	*PIPELINE*	*N/A*	*CHEROKEE PIPELINE CO.*
197.8	*PIPELINE*	*N/A*	*SINCLAIR REFINING CO.*
198.7	*PIPELINE*	*N/A*	*GULF CENTRAL PIPELINE CO.*
198.7	*PIPELINE*	*N/A*	*MISSOURI PIPELINE CO.*
198.7	*PIPELINE*	*N/A*	*AMOCO PIPELINE CO.*
200.1	*AERIAL*	*N/A*	*AMEREN UE ELECTRIC CO.*