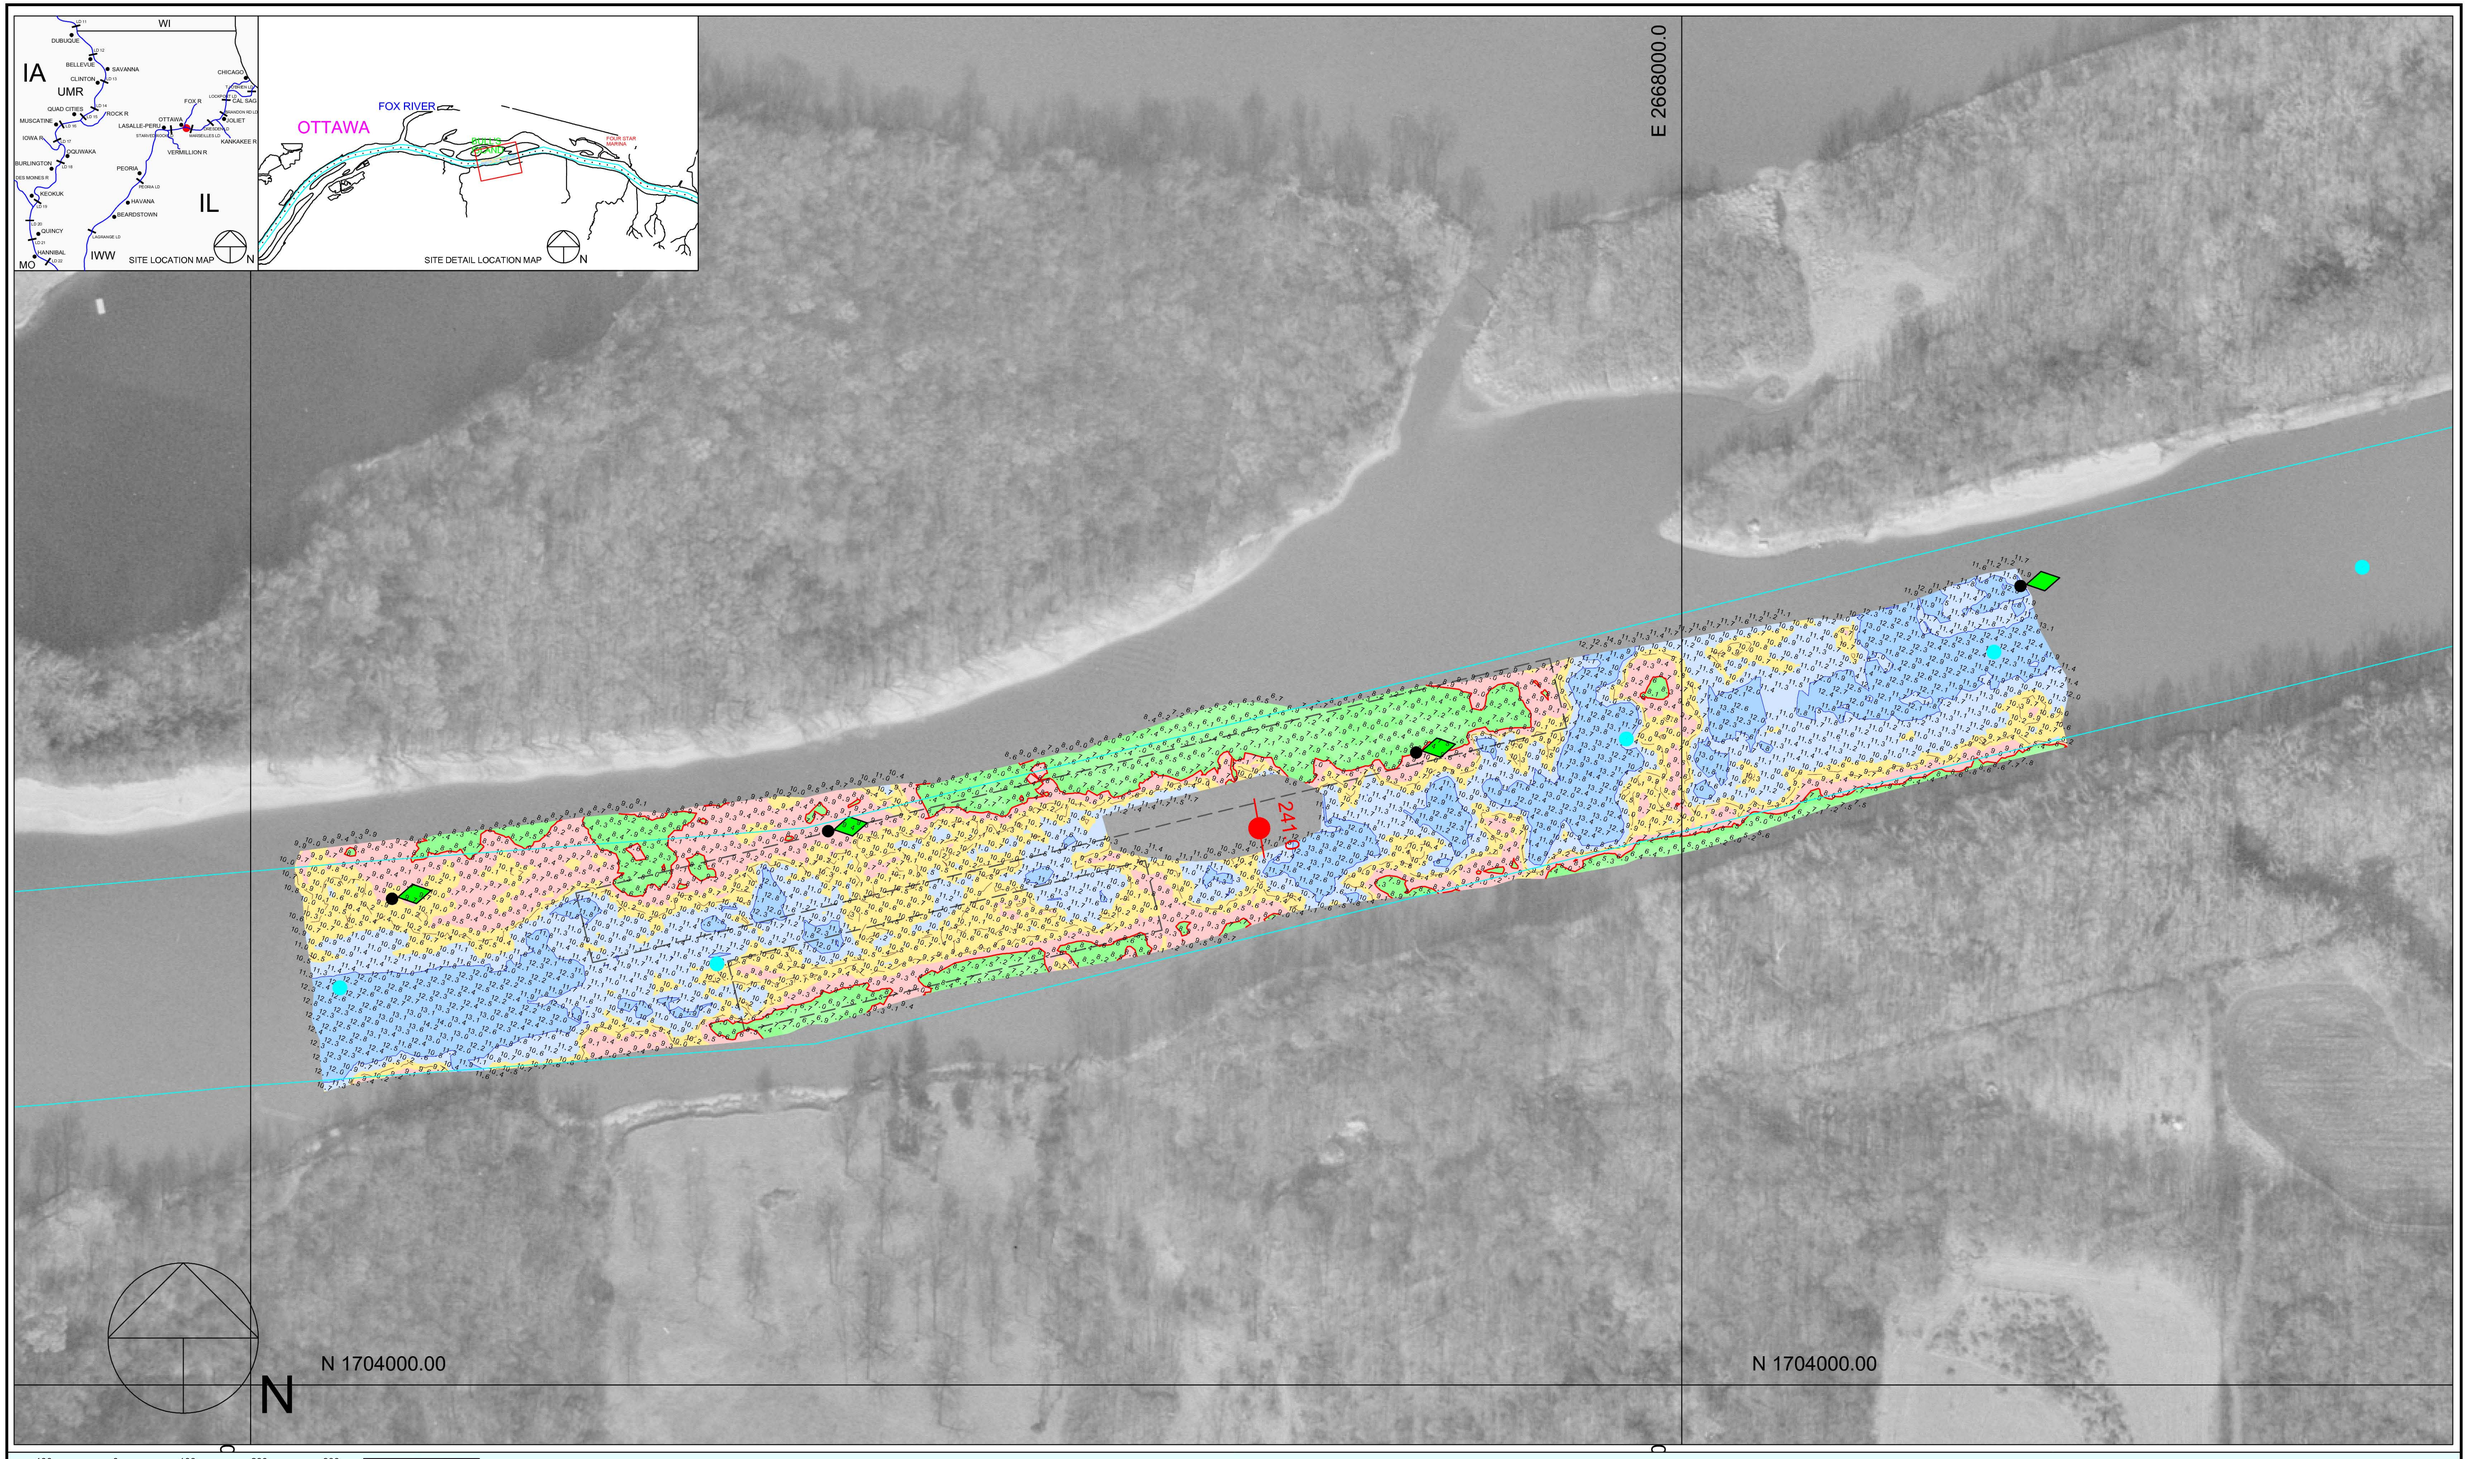

100 0 100 200 300

Scale 1" = 100'

Multi-Transducer Survey with Complete Coverage

Channel Contour Color Fill Legend

-10' - -1' | 0' - 8' | 9' | 10' | 11' - 19' | 20' - 29' | 30' - 50'

Location	Stage	Flat Pool
Morris	4.3 =	482.8
LaSalle	10.2 =	440.2
Peoria	11.6 =	440.0
Havana	4.8 =	429.2
Beardstown	9.1 =	429.0

Hydrographic Survey of the Illinois Waterway Ortho photography flown 1995

Horizontal Projection: State Plane, NAD1983, Illinois West - 1202 U.S. Survey Feet

Vertical Datum: NGVD 1929 U.S. Survey Feet. All soundings adjusted to Flat Pool: 458.5

Water Surface at time of survey: 458.8 / Water Stage: +0.3 Feet

Survey Vessel: MV Holling

Conducted by: Justin Coldwater and Rick Anderson

Processed in Autodesk LDDT by: Bob Adams on 14 Oct 2011

File Name: IWW_SR_2408-2412_11D.dwg

US ARMY CORPS OF ENGINEERS

OPERATIONS DIVISION - TECH SUPPORT BRANCH

Bulls Island Upper

DEPICTS ONGOING MECHANICAL DREDGE EVENT

Survey Date: 13 Oct 2011

IWW / Starved Rock Pool - Reach River Miles: 240.8 - 241.2

I/SR